




Magellan Pipeline Company, L.P., is a subsidiary of ONEOK

---

## **Appendix O**


# **Easement Configuration and Best Management Practice Typical**

- GRADING, EROSION, AND SEDIMENT CONTROL (GESC) GENERAL NOTES
- THE SOUTHEAST METRO STORMWATER AUTHORITY (SEMSWA) LAND DEVELOPMENT REVIEW MANAGER SIGNATURE AFFIXED TO THIS DOCUMENT INDICATES SEMSWA HAS REVIEWED THE DOCUMENT AND FOUND IT IN GENERAL COMPLIANCE WITH THE GRADING, EROSION AND SEDIMENT CONTROL (GESC) MANUAL. THE LAND DEVELOPMENT REVIEW MANAGER THROUGH ACCEPTANCE OF THIS DOCUMENT, ASSUMES NO RESPONSIBILITY (OTHER THAN AS STATED ABOVE) FOR THE COMPLETENESS AND/OR ACCURACY OF THESE DOCUMENTS.
  - THE ADEQUACY OF THIS GESC PLAN LIES WITH THE ORIGINAL DESIGN ENGINEER. CHANGES TO DESIGN INTENT THAT MEET THE DEFINITION OF MAJOR MODIFICATIONS MUST GO THROUGH ORIGINAL DESIGN ENGINEER.
  - THE GESC PLAN SHALL BE CONSIDERED VALID FOR TWO (2) YEARS FROM THE DATE OF ACCEPTANCE BY SEMSWA, AFTER WHICH TIME THE PLAN SHALL BE VOID AND WILL BE SUBJECT TO RE-REVIEW AND RE-ACCEPTANCE BY SEMSWA. PLANS MUST CONFORM TO CURRENT REQUIREMENTS.
  - ALL MATERIALS AND WORKMANSHIP SHALL BE SUBJECT TO INSPECTION BY SEMSWA'S INSPECTION DIVISION. SEMSWA RESERVES THE RIGHT TO ACCEPT OR REJECT ANY SUCH MATERIALS AND WORKMANSHIP THAT DOES NOT CONFORM TO THE GESC MANUAL, GESC PLAN OR GESC PERMIT.
  - THE PLACEMENT OF EROSION AND SEDIMENT CONTROL MEASURES SHALL BE IN ACCORDANCE WITH THE ACCEPTED GESC PLAN AND THE SEMSWA GESC MANUAL.
  - ANY VARIATION IN MATERIAL, TYPE OR LOCATION OF EROSION AND SEDIMENT CONTROL MEASURES FROM THE SEMSWA - ACCEPTED GESC PLAN WILL REQUIRE APPROVAL FROM AN ACCOUNTABLE REPRESENTATIVE OF SEMSWA.
  - UPON RECEIVING THE APPROVED, SIGNED AND STAMPED GESC PLANS AND REPORT, THE CONTRACTOR MAY INSTALL THE NON-EARTH DISTURBING INITIAL-STAGE EROSION AND SEDIMENT CONTROL MEASURES INDICATED ON THE ACCEPTED GESC PLAN.
  - AFTER INSTALLATION OF THE INITIAL-STAGE EROSION AND SEDIMENT CONTROL MEASURES, THE PERMITTEE SHALL CALL THE INSPECTION DIVISION TO SCHEDULE A PRECONSTRUCTION MEETING AT THE PROJECT SITE. THE REQUEST SHALL BE MADE NO LESS THAN 24 HOURS PRIOR TO THE REQUESTED MEETING TIME. NO CONSTRUCTION ACTIVITIES SHALL BE PLANNED WITHIN 24 HOURS AFTER THE PRECONSTRUCTION MEETING.
  - IN ADDITION TO THE SEMSWA INSPECTOR AND GESC MANAGER, THE FOLLOWING REPRESENTATIVES SHOULD ATTEND: GENERAL CONTRACTOR, OWNER, OR OWNER'S REPRESENTATIVE AND GRADING SUBCONTRACTOR. IF ANY OF THE REQUIRED PARTICIPANTS FAIL TO ATTEND THE PRECONSTRUCTION MEETING, OR IF THE INSTALLATION OF THE INITIAL CONTROL MEASURES ARE NOT APPROVED BY THE SEMSWA INSPECTOR, THE APPLICANT WILL HAVE TO PAY A REINSPECTION FEE, ADDRESS ANY PROBLEMS WITH CONTROL MEASURE INSTALLATION, AND CALL TO RESCHEDULE THE MEETING, WITH A CORRESPONDING DELAY IN THE START OF CONSTRUCTION.
  - CONSTRUCTION SHALL NOT BEGIN UNTIL THE SEMSWA INSPECTOR APPROVES THE INSTALLATION OF THE INITIAL CONTROL MEASURES AND THE APPROVED GESC PERMIT HAS BEEN ISSUED BY SEMSWA AND IS IN-HAND ON THE SITE. THE COMPLETED PERMIT WILL GENERALLY BE FIELD ISSUED OR ISSUED VIA EMAIL AFTER THE INSTALLATION OF THE INITIAL CONTROL MEASURES ARE APPROVED.
  - THE GESC MANAGER SHALL STRICTLY ADHERE TO THE SEMSWA APPROVED LIMITS OF CONSTRUCTION AT ALL TIMES. THE SEMSWA INSPECTION DIVISION MUST APPROVE ANY CHANGES TO THE LIMITS OF CONSTRUCTION AND, AT THE DISCRETION OF THE INSPECTION DIVISION, ADDITIONAL EROSION/SEDIMENT CONTROLS MAY BE REQUIRED IN ANY ADDITIONAL AREAS OF CONSTRUCTION/ DISTURBANCE ARE NEEDED.
  - THE MAXIMUM AREA OF CONSTRUCTION SHALL BE LIMITED TO 40 ACRES (70 ACRES IF APPROVED FOR SOIL MITIGATION OPERATIONS) TO REDUCE THE AMOUNT OF LAND DISTURBED AT ANY ONE TIME. LARGER SITES SHALL BE DIVIDED INTO PHASES THAT ARE EACH 40 (OR 70) ACRES OR LESS IN SIZE. THESE PROJECTS SHALL CONDUCT GRADING ACTIVITIES IN ACCORDANCE WITH THE ACCEPTED GESC PLAN. CONTROL MEASURE INSTALLATION AND APPROVAL BY SEMSWA AT THE START AND COMPLETION OF EACH PHASE SHALL BE CONDUCTED IN ACCORDANCE WITH THE PROCEDURES OUTLINED IN THE GESC MANUAL.
  - NATURAL VEGETATION SHALL BE RETAINED AND PROTECTED WHEREVER POSSIBLE. EXPOSURE OF SOIL TO EROSION BY REMOVAL OR DISTURBANCE OF VEGETATION SHALL BE LIMITED TO THE AREA REQUIRED FOR IMMEDIATE CONSTRUCTION OPERATIONS.
  - THE GESC PERMIT SHALL BE VALID FOR A PERIOD OF TWO (2) YEARS.
  - A COPY OF THE GESC PERMIT AND APPROVED GESC PLANS SHALL BE ON SITE OR MADE AVAILABLE UPON REQUEST.
  - THE GESC MANAGER SHALL BE RESPONSIBLE PARTY FOR ENSURING THAT THE SITE REMAINS IN COMPLIANCE WITH THE GESC PERMIT AND SHALL BE THE PERMITTEE'S CONTACT PERSON WITH SEMSWA FOR ALL MATTERS PERTAINING TO THE GESC PERMIT. THE GESC MANAGER SHALL BE ON THE SITE AS NECESSARY TO ENSURE THE GESC REQUIREMENTS ARE BEING IMPLEMENTED, AND (ALONG WITH THE ALTERNATE GESC MANAGER) SHALL PROVIDE SEMSWA WITH A 24-HOUR EMERGENCY CONTACT NUMBER. IN THE EVENT THAT THE CONTRACTOR'S GESC MANAGER IS NOT ON SITE AND CANNOT BE REACHED DURING A VIOLATION, THE ALTERNATE GESC MANAGER SHALL BE CONTACTED. IF NEITHER THE GESC MANAGER NOR ALTERNATE GESC MANAGER CAN BE CONTACTED DURING ANY VIOLATION, WITHIN 24 HOURS, VIOLATION MAY BE ISSUED TO THE PERMITTEE(S).
  - ALL CONSTRUCTION TRAFFIC MUST EXIT THE SITE THROUGH THE SEMSWA-APPROVED ACCESS POINT. A VEHICLE TRACKING CONTROL PAD IS REQUIRED AT ALL EXIT POINTS ON THE SITE. ADDITIONAL STABILIZED CONSTRUCTION ENTRANCES MAY BE ADDED WITH AUTHORIZATION FROM THE SEMSWA INSPECTION DIVISION.
  - THE GESC MANAGER IS RESPONSIBLE FOR CLEANUP OF SEDIMENT OR CONSTRUCTION DEBRIS TRACKED ONTO ADJACENT PAVED AREAS. PAVED AREAS INCLUDING STREETS ARE TO BE KEPT CLEAN THROUGHOUT BUILD-OUT AND SHALL BE CLEARED WITH A STREET SWEEPER OR SIMILAR DEVICE, AT FIRST NOTICE OF ACCIDENTAL TRACKING OR AT THE DISCRETION OF THE SEMSWA GESC INSPECTOR. STREET WASHING IS NOT ALLOWED. SEMSWA RESERVES THE RIGHT TO REQUIRE ADDITIONAL MEASURES TO ENSURE AREA STREETS ARE KEPT FREE OF SEDIMENT AND/OR CONSTRUCTION DEBRIS.
  - APPROVED EROSION AND SEDIMENT CONTROL MEASURES SHALL BE MAINTAINED AND KEPT IN GOOD REPAIR FOR THE DURATION OF THIS PROJECT. AT A MINIMUM, THE GESC MANAGER SHALL INSPECT ALL CONTROL MEASURES IN ACCORDANCE WITH THE ACCEPTED GESC PLAN AND GESC MANUAL. ALL NECESSARY MAINTENANCE AND REPAIR ACTIVITIES SHALL BE COMPLETED WITHIN 48 HOURS. ACCUMULATED SEDIMENT AND CONSTRUCTION DEBRIS SHALL BE REMOVED AND PROPERLY DISPOSED.
  - STRAW BALES ARE NOT A SEMSWA GESC-ACCEPTED SEDIMENT CONTROL MEASURE.
  - TOPSOIL SHALL BE STRIPPED AND STOCKPILED IN THE LOCATION SHOWN ON THE ACCEPTED GESC PLAN. THE TOPSOIL STOCKPILE(S) SHALL FOLLOW ALL STOCKPILING CRITERIA DESCRIBED IN THE GESC MANUAL. TOPSOIL SHALL BE REPLACED AT A MINIMUM DEPTH OF 6 INCHES. IF A MINIMUM DEPTH OF 6 INCHES CAN NOT BE OBTAINED, ADDITIONAL TOPSOIL AND/ OR APPROVED SOIL AMENDMENTS WILL BE REQUIRED TO BE PLACED PRIOR TO SEEDING AND MULCHING.
  - THE ACCEPTED GESC PLAN MAY REQUIRE CHANGES OR ALTERATIONS AFTER APPROVAL TO MEET CHANGING SITE OR PROJECT CONDITIONS OR TO ADDRESS INEFFICIENCIES IN DESIGN OR INSTALLATION. THE GESC MANAGER SHALL OBTAIN PRIOR APPROVAL FOR MAJOR MODIFICATIONS FROM THE DESIGN ENGINEER AND SEMSWA FOR ANY PROPOSED CHANGES.
  - LINING OF TEMPORARY SWALES AND DITCHES SHALL BE IN ACCORDANCE WITH THE GESC MANUAL.
  - ANY SETTLEMENT OR SOIL ACCUMULATIONS BEYOND THE LIMITS OF CONSTRUCTION DUE TO GRADING OR EROSION SHALL BE REPAIRED IMMEDIATELY BY THE GESC MANAGER. THE GESC MANAGER SHALL BE HELD RESPONSIBLE FOR OBTAINING ACCESS RIGHTS TO ADJACENT PROPERTY, IF NEEDED, AND REMEDIATING ANY ADVERSE IMPACTS TO ADJACENT WATERWAYS, WETLANDS, PROPERTIES, ETC. RESULTING FROM WORK DONE AS PART OF THIS PROJECT.
  - A WATER SOURCE SHALL BE AVAILABLE ON SITE DURING EARTHWORK OPERATIONS AND UTILIZED AS REQUIRED TO MINIMIZE DUST FROM EARTHWORK EQUIPMENT AND WIND.
  - SOILS THAT WILL BE STOCKPILED FOR MORE THAN THIRTY (30) DAYS SHALL BE SEEDDED AND MULCHED WITHIN FOURTEEN (14) DAYS OF STOCKPILE CONSTRUCTION. NO STOCKPILES SHALL BE PLACED WITHIN ONE HUNDRED (100) FEET OF A DRAINAGE WAY UNLESS APPROVED BY SEMSWA.
  - ALL CHEMICAL OR HAZARDOUS MATERIAL SPILLS WHICH MAY ENTER WATERS OF THE STATE OF COLORADO, WHICH INCLUDE BUT ARE NOT LIMITED TO, SURFACE WATER, GROUND WATER AND DRY GULLIES OR STORM SEWER LEADING TO SURFACE WATER, SHALL BE IMMEDIATELY REPORTED TO THE COPIE PER CRS 25-8-601, AND SEMSWA. RELEASES OF PETROLEUM PRODUCTS AND CERTAIN HAZARDOUS SUBSTANCES LISTED UNDER THE FEDERAL CLEAN WATER ACT (40 CFR PART 116) MUST BE REPORTED TO THE NATIONAL RESPONSE CENTER AS WELL AS THE COPIE. CONTACT INFORMATION FOR COPIE, SEMSWA AND THE NATIONAL RESPONSE CENTER CAN BE FOUND IN APPENDIX A. SPILLS THAT POSE AN IMMEDIATE RISK TO HUMAN LIFE SHALL BE REPORTED TO 911. FAILURE TO REPORT AND CLEAN UP ANY SPILL SHALL RESULT IN ISSUANCE OF A STOP WORK ORDER. TO REPORT SPILLS TO SEMSWA CALL 303-858-8844.
  - ALL WORK ON SITE SHALL STAY A MINIMUM OF ONE HUNDRED (100) FEET AWAY FROM ANY DRAINAGE WAY, WETLAND, ETC. UNLESS OTHERWISE NOTED ON AN ACCEPTED SEMSWA GESC PLAN.
  - THE USE OF REBAR, STEEL STAKES STAPLES, OR STEEL FENCE POSTS FOR STAKING OR SUPPORT OF ANY EROSION OR SEDIMENT CONTROL MEASURE IS PROHIBITED (EXCEPT STEEL TEE-POSTS FOR USE IN SUPPORTING CONSTRUCTION FENCES).
  - THE CLEANING OF CONCRETE DELIVERY TRUCK CHUTES IS RESTRICTED TO APPROVED CONCRETE WASH OUT LOCATIONS ON THE JOB SITE. THE DISCHARGE OF WATER CONTAINING WASTE CONCRETE TO THE STORM SEWER SYSTEM IS PROHIBITED. ALL CONCRETE WASTE SHALL BE PROPERLY CLEANED UP AND DISPOSED AT AN APPROPRIATE LOCATION.
  - ALL DEWATERING ON SITE SHALL BE COORDINATED WITH A SEMSWA GESC INSPECTOR AND BE FREE OF SEDIMENT IN ACCORDANCE WITH THE GESC MANUAL, AND STATE OF COLORADO DEWATERING PERMIT.
  - ALL PERMANENT INSTALLATIONS OF PIPES FOR STORM SEWERS, SLOPE DRAINS, AND CULVERTS, TOGETHER WITH RIPRAP APRONS OR OTHER INLET AND OUTLET PROTECTION, REQUIRE INSPECTION BY SEMSWA (SEPARATE FROM GESC INSPECTIONS).
  - ALL DISTURBED AREAS SHALL BE STABILIZED IN ACCORDANCE WITH THE GESC MANUAL WITHIN 14 DAYS OF SUBSTANTIAL COMPLETION OF GRADING, INCLUDING AREAS TO REMAIN DORMANT FOR LONGER THAN 30 DAYS, WHICHEVER IS LESS. THIS MAY REQUIRE MULTIPLE MOBILIZATIONS FOR SEEDING AND MULCHING.
  - HYDRAULIC SEEDING IS NOT AN ACCEPTABLE METHOD OF SEEDING WITHIN THE SEMSWA SERVICE AREA.
  - HYDRO-MULCH MAY BE USED FOR LIMITED APPLICATIONS AS APPROVED BY SEMSWA.
  - UTILITY LINE INSTALLATION SHALL COMPLY WITH THE FOLLOWING CRITERIA:
    - ALL UTILITY WORK WITHIN A RIGHT-OF-WAY SHALL BE REQUIRED TO OBTAIN A RIGHT-OF-WAY USE AND CONSTRUCTION PERMIT IN ACCORDANCE WITH THE APPROPRIATE STANDARDS.
    - PROVIDE ADEQUATE EROSION AND SEDIMENT CONTROLS.
    - AT THE END OF A WORK DAY, NO TRENCH SHALL BE LEFT OPEN AND BACKFILL MUST BE COMPLETED TO GRADE.
    - WHERE CONSISTENT WITH SAFETY AND SPACE CONSIDERATIONS, EXCAVATED MATERIAL IS TO BE PLACED ON THE UPHILL SIDE OF TRENCHES.
    - AT NO TIME SHALL EXCAVATED MATERIAL BE PLACED ON THE STREET.
    - TRENCH DEWATERING DEVICES MUST DISCHARGE IN A MANNER THAT WILL NOT EFFECT STREAMS, WETLANDS, DRAINAGE SYSTEMS, OR OFF-SITE PROPERTY. DISCHARGE FROM TRENCH SHALL BE FREE OF ANY SEDIMENT. A RIPRAP PAD SHALL BE PLACED AT THE DISCHARGE END OF THE HOSE TO PREVENT ANY ADDITIONAL EROSION.
    - STORM SEWER INLET PROTECTION SHALL BE PROVIDED. HOWEVER, SOIL PROSION FROM THE EXCAVATED AREA HAS POTENTIAL OF ENTERING THE STORM DRAINAGE SYSTEM.
    - ALL DISTURBED AREAS SHALL BE DRILL, SEEDDED AND CRIMP MULCHED WITHIN FIVE DAYS AFTER UTILITY INSTALLATION IS COMPLETED.
    - ALL OTHER APPLICABLE CRITERIA AS OUTLINED IN THE GESC MANUAL.
  - ALL SINGLE-FAMILY RESIDENTIAL DEVELOPMENT PROJECTS SHALL COMPLY WITH THE GESC CRITERIA AS PRESENTED IN THE GESC MANUAL.
  - NO RECYCLED ASPHALT SHALL BE USED AS A CONTROL MEASURE. RECYCLED CONCRETE MUST BE APPROVED BY SEMSWA.
  - SEMSWA MAY ALLOW THE INSTALLATION OF ALTERNATIVE CONTROL MEASURES OTHER THAN THE GESC PLAN STANDARD NOTES AND DETAILS. IF ALTERNATIVE EROSION AND SEDIMENT CONTROL MEASURES WILL BE USED, OUT SHEETS MUST BE SUBMITTED TO THE SEMSWA INSPECTOR.
  - IF YOU ARE EXPORTING EXCESS DIRT WITHIN THE SEMSWA SERVICE AREA, YOU WILL BE REQUIRED TO OBTAIN A GESC PERMIT FOR THE SECONDARY SITE.

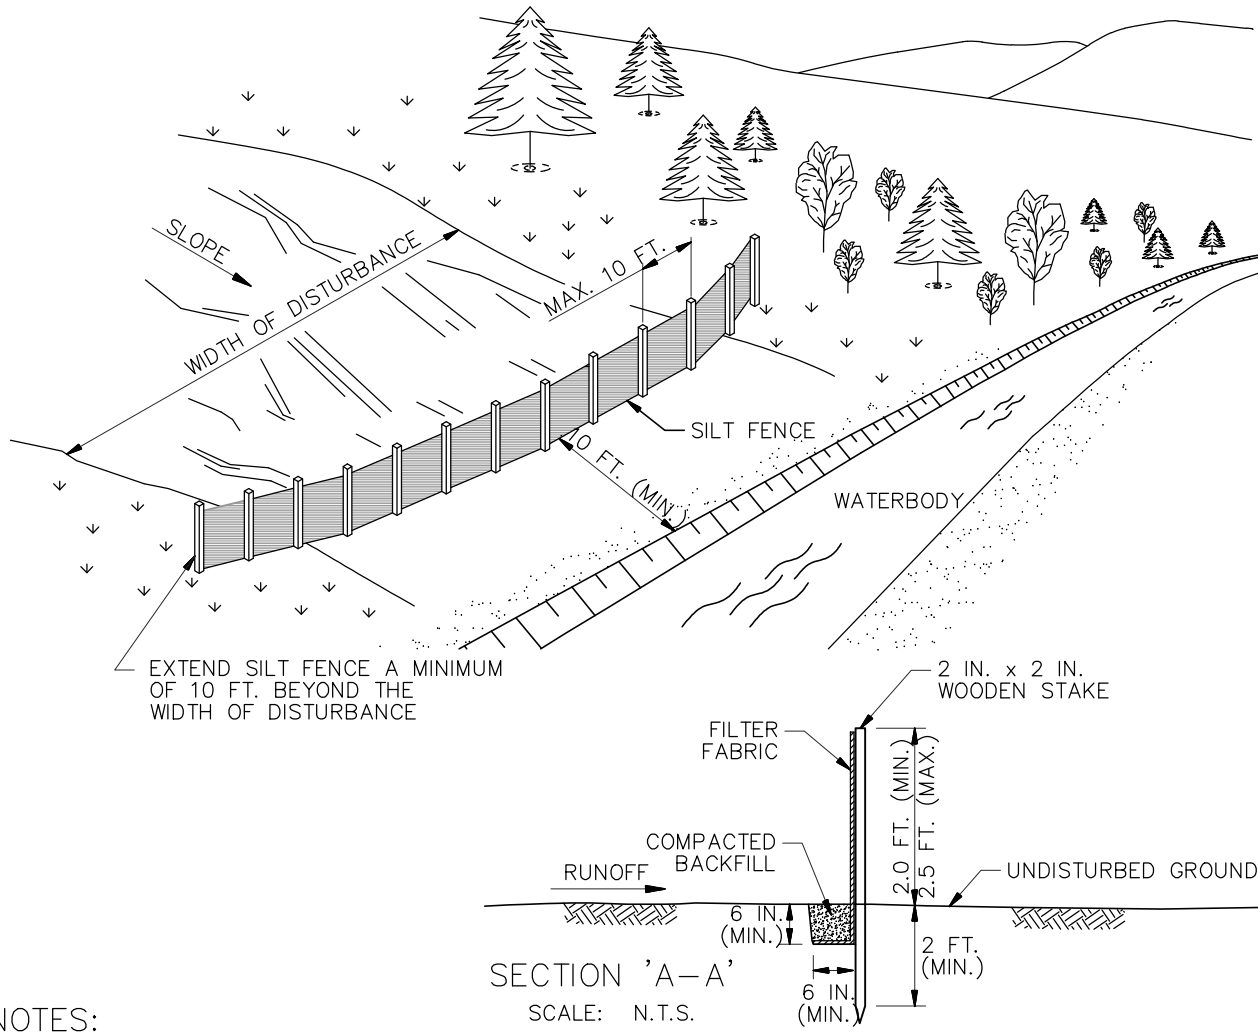

#### NOTES:

- SILT FENCES ARE TO BE USED IN AREAS WHERE SHEET FLOW OR RELATIVELY SMALL VOLUMES OF WATER CAN BE EXPECTED TO OCCUR. FOR LARGER VOLUMES SUCH AS WITHIN A DEFINED CHANNEL, A CHECK DAM WILL BE REQUIRED.
- STAKES ARE TO BE PLACED EVERY TEN (10) FT. OR CLOSER AS CONDITIONS REQUIRE.
- ATTACH FILTER FABRIC AT EACH POST AT A MINIMUM OF THREE (3) LOCATIONS.
- THE FILTER FABRIC (MIN. OF 1 FT.) IS TO BE ANCHORED IN A 6 INCH x 6 INCH TRENCH WITH WELL COMPACTED BACKFILL OVER THE FABRIC TO PREVENT UNDERMINING.
- TO ELIMINATE POSSIBLE END FLOW, BOTH ENDS OF THE SILT FENCE SHALL BE TURNED AND EXTENDED UPSLOPE.
- SILT FENCES ARE TO BE CHECKED AND MAINTAINED ON A REGULAR BASIS. REMOVE ANY BUILD-UP OF SEDIMENT WHEN THE HEIGHT OF SEDIMENT EXCEEDS APPROXIMATELY 20% OF THE HEIGHT OF THE BARRIER.
- MATERIAL SHOULD BE WOVEN GEOTEXTILE FABRIC SUCH AS EXXON GTF 180 OR MIRAFI 600X, OR AN APPROVED EQUIVALENT. SECONDARY REINFORCEMENT, SUCH AS A CONSTRUCTION BARRIER FENCE OR WIRE MESH CAN ALSO BE USED BEHIND THE FILTER FABRIC.
- WHERE ANCHORING CONDITIONS FOR THE SILT FENCE ARE POOR, PLACE ANCHORED STRAW BALES ON DOWNSTREAM SIDE OF THE SILT FENCE.

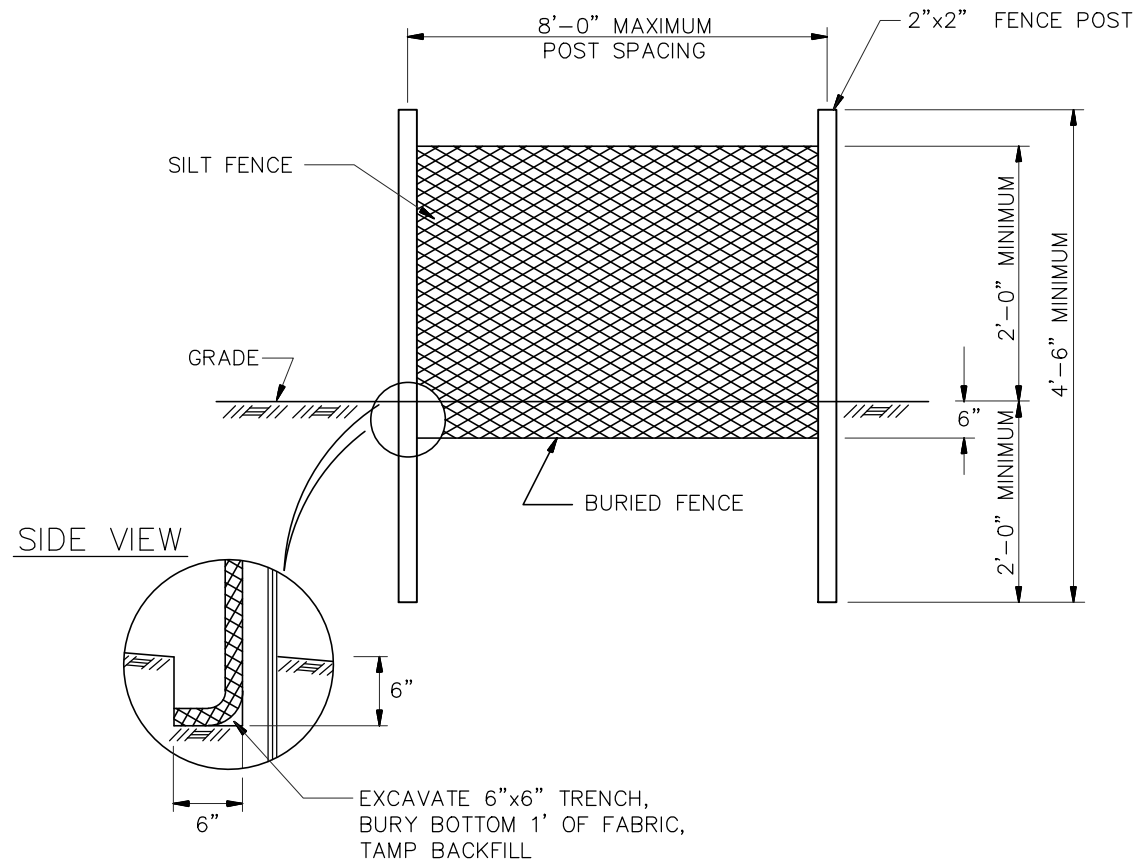

#### NOTES:


- SILT FENCES ARE CONSTRUCTED FROM SYNTHETIC MESH MATERIAL DESIGNED TO RETAIN SILT WHILE ALLOWING WATER TO PASS THROUGH. (AMOCO CONSTRUCTION FABRIC 1380 SILT STOP OR AS REQUIRED BY LANDOWNER AND/ OR PERMITTING AGENCY).
- SILT FENCES WILL BE CONSTRUCTED AT THE EDGE OF THE R-O-W:
  - AT THE OUTFALL OF AN INTERCEPTOR DIKE IF NATURAL VEGETATION IS INSUFFICIENT TO FILTER THE SILT FROM THE RUN-OFF WATER.
  - AT THE BASE OF SLOPES ADJACENT TO ROADWAYS AND STREAMS WHEN THE NATIVE VEGETATION COVER HAS BEEN DISTURBED.
  - WHEN THE DISTANCE (IN AREAS OF GOOD VEGETATION COVER) OF THE R-O-W TO A BODY OF WATER IS EQUAL TO OR LESS THAN THE FOLLOWING SCHEDULE.

| PERCENT SLOPE | DISTANCE |
|---------------|----------|
| 0 - 5%        | 25 FEET  |
| 5 - 15%       | 50 FEET  |
| 15 - 30%      | 75 FEET  |
| OVER 30%      | 100 FEET |

  - WHEN THE DISTANCE (IN AREAS OF POOR VEGETATION COVER) OF THE R-O-W TO A BODY OF WATER IS WITHIN 150 FEET AND THE AREA SLOPES TOWARD THE WATER.

#### EROSION CONTROL SILT FENCE

SCALE: NOT TO SCALE


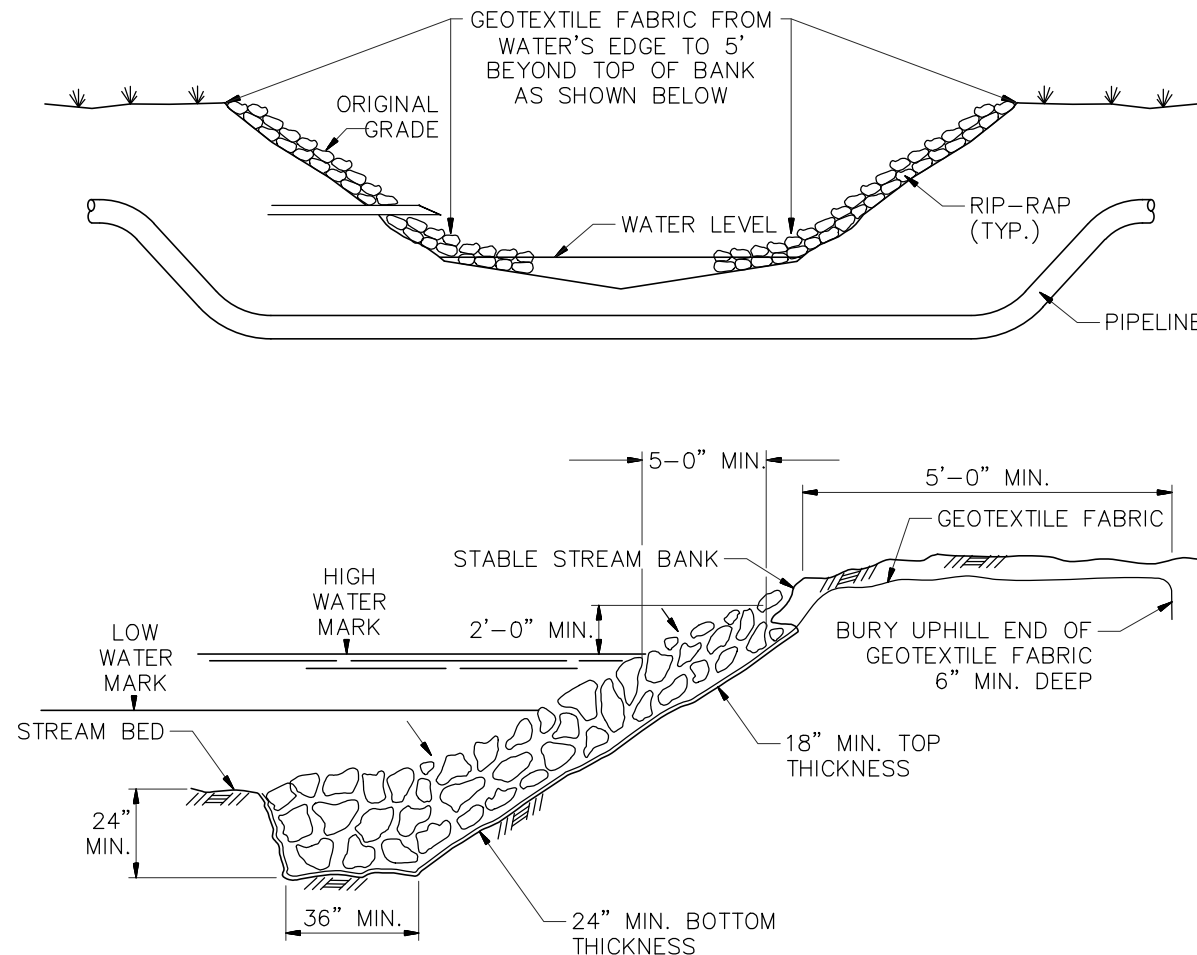


#### NOTES:

- RIP-RAP SHALL BE PLACED IN SUCH A MANNER AS TO PRODUCE A REASONABLY WELL GRADED MASS.
- THE FINISHED RIP-RAP SHALL BE FREE OF OBJECTIONABLE POCKETS OF SMALL STONES.
- ROCK FOR RIP-RAP SHALL CONSIST OF SOUND, DENSE ANGULAR ROCK FRAGMENTS, RESISTANT TO WEATHERING AND FREE OF SOIL, SHALE AND ORGANIC MATTER. STONE SHALL BE 8" TO 18" IN DIAMETER UNLESS OTHERWISE SPECIFIED.
- GEOTEXTILE FABRIC SHALL BE SUPAC 8NP OR ENGINEER APPROVED EQUAL FABRIC OVERLAP AND ANCHORING SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
- RIP-RAP SHALL COMPLY WITH ANY APPLICABLE PERMITTING AGENCY/LANDOWNER SPECIFICATIONS. MINIMUM WIDTH OF RIP-RAP SHALL BE 20', 10' EACH WAY FROM CENTERLINE OF PIPE.
- GEOTEXTILE FABRIC SHALL BE RUN HORIZONTAL AND PARALLEL TO THE GROUND CONTOUR UNDER THE RIP-RAP. RIP-RAP MAY NOT BE PLACED HIGHER THAN TOP OF BANK VERTICALLY.
- STAPLES SHALL BE TEN (10) INCHES LONG, STANDARD MATTING/NETTING STAPLES.
- RIP-RAP CANNOT CHANGE THE CROSS SECTIONAL PROFILE OF THE STREAM AFTER CONSTRUCTION. THE BANK MAY BE GRADED TO ALLOW PLACEMENT OF RIP-RAP TO BE EVEN WITH ADJACENT ELEVATIONS.
- KEY IN THE EDGES OF THE RIP-RAP AND GEOTEXTILE FABRIC TO GROUND CONTOURS SO THAT UNDERMINING DOES NOT OCCUR.

#### RIPRAP

SCALE: NOT TO SCALE

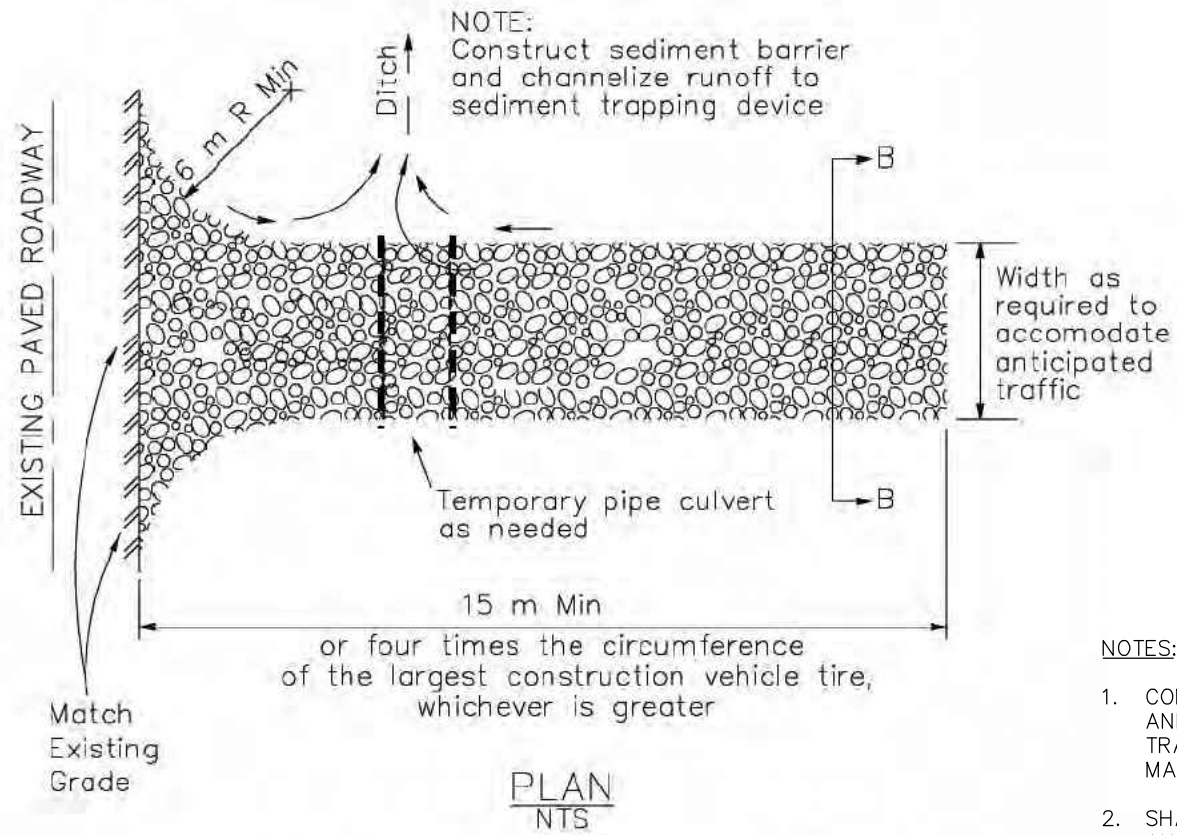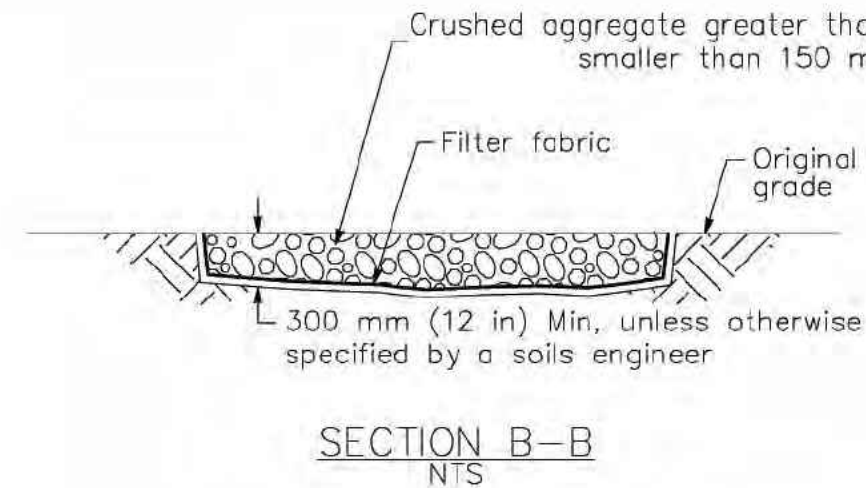

#### NOTES:

- CONTRACTOR SHALL FURNISH AND INSTALL ADEQUATE TRAFFIC CONTROL SIGNS, MARKERS, FLASHERS, ETC.
- SHALL ALSO COMPLY WITH ANY COUNTY OR STATE PERMIT REQUIREMENTS.

SCALE: NOT TO SCALE

#### CONTROL MEASURE NOTES

- AASHTO #1 ROCK CONSTRUCTION ENTRANCE
  - INLET PROTECTION
  - RIPRAP
  - SILT FENCE
  - CHECK DAM
  - EROSION CONTROL BLANKET INSTALLATION
  - SLOPE INTERCEPT DITCH
  - CONSTRUCTION MARKER
  - SEED AND MULCH
  - LIMITS OF CONSTRUCTION (SEE PROPOSED EASEMENT BOUNDARY / TEMPORARY WORKSPACE BOUNDARY BELOW)
- (1) ATWS WILL HAVE RESTRICTED USE (NO TOP SOIL STORAGE, HAZARDOUS MATERIAL STORAGE, OR REFUELING WILL OCCUR).

#### ENVIRONMENTAL NOTES / LEGEND

- (1) ENVIRONMENTAL EXCLUSION AREAS WILL BE MARKED BY EXCLUSION FENCING AND SIGNAGE.

- PROPOSED CENTERLINE
- PROPOSED EASEMENT BOUNDARY
- TEMPORARY WORKSPACE BOUNDARY
- ADDITIONAL TEMPORARY WORKSPACE
- CONSTRUCTION MARKER
- SLOPE INTERCEPT DITCH
- SILT FENCE
- EROSION CONTROL BLANKET
- AASHTO #1 ROCK CONSTRUCTION ENTRANCE
- BORE ENTRY/EXIT
- ACCESS ROAD
- FOREIGN PIPELINE
- OTHER UTILITY
- EXISTING EASEMENT
- DRAINAGE FLOW
- WETLAND
- STREAM
- FLOODPLAIN
- PROPERTY BOUNDARY
- SECTION BOUNDARY
- TOWNSHIP BOUNDARY

#### BILL OF MATERIALS

#### REFERENCE DRAWINGS

| REF. | DWG. NUMBER | DWG. TITLE |
|------|-------------|------------|
|      |             |            |
|      |             |            |
|      |             |            |
|      |             |            |
|      |             |            |

#### CP FEATURE DATA

#### REVISIONS

| REV. | DATE     | BY  | DESCRIPTION              |
|------|----------|-----|--------------------------|
| 0    | 12/06/24 | ALS | ISSUED FOR PERMIT FILING |
|      |          |     |                          |
|      |          |     |                          |
|      |          |     |                          |
|      |          |     |                          |
|      |          |     |                          |

#### DENVER EXPANSION PROJECT - SCOTT CITY TO DENVER PIPELINE


|                                                                                                      |                                                                                                                                               |                                                                                                                                         |
|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>ONEOK</b><br>t: +1 (918) 588-7000<br>ONEOK Plaza<br>100 West Fifth Street<br>Tulsa, OK 74103, USA | <b>MAGELLAN</b><br>LTD PARTNERS, L.P.<br>t: +1 (713) 439-3600<br>f: +1 (713) 963-9085<br>11330 Clay Road, Suite 550<br>Houston, TX 77041, USA | <b>EXP Energy Services Inc.</b><br>t: +1 (713) 439-3600<br>f: +1 (713) 963-9085<br>11330 Clay Road, Suite 550<br>Houston, TX 77041, USA |
|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|

|              |     |        |              |
|--------------|-----|--------|--------------|
| DRAWN BY:    | ALS | DATE:  | 10/02/24     |
| CHECKED BY:  | DS  | SCALE: | NOT TO SCALE |
| APPROVED BY: | SS  | SHEET: | 41 OF 42     |

ALL SEALS FOR THE SET OF DRAWINGS ARE APPLIED TO THE COVER PAGE.

## GRADING, EROSION AND SEDIMENT CONTROL PLAN ARAPAHOE COUNTY, COLORADO EROSION CONTROL NOTES & DETAILS


|              |                 |           |   |
|--------------|-----------------|-----------|---|
| DWG. NUMBER: | 1001-02-001-039 | REVISION: | 0 |
|--------------|-----------------|-----------|---|

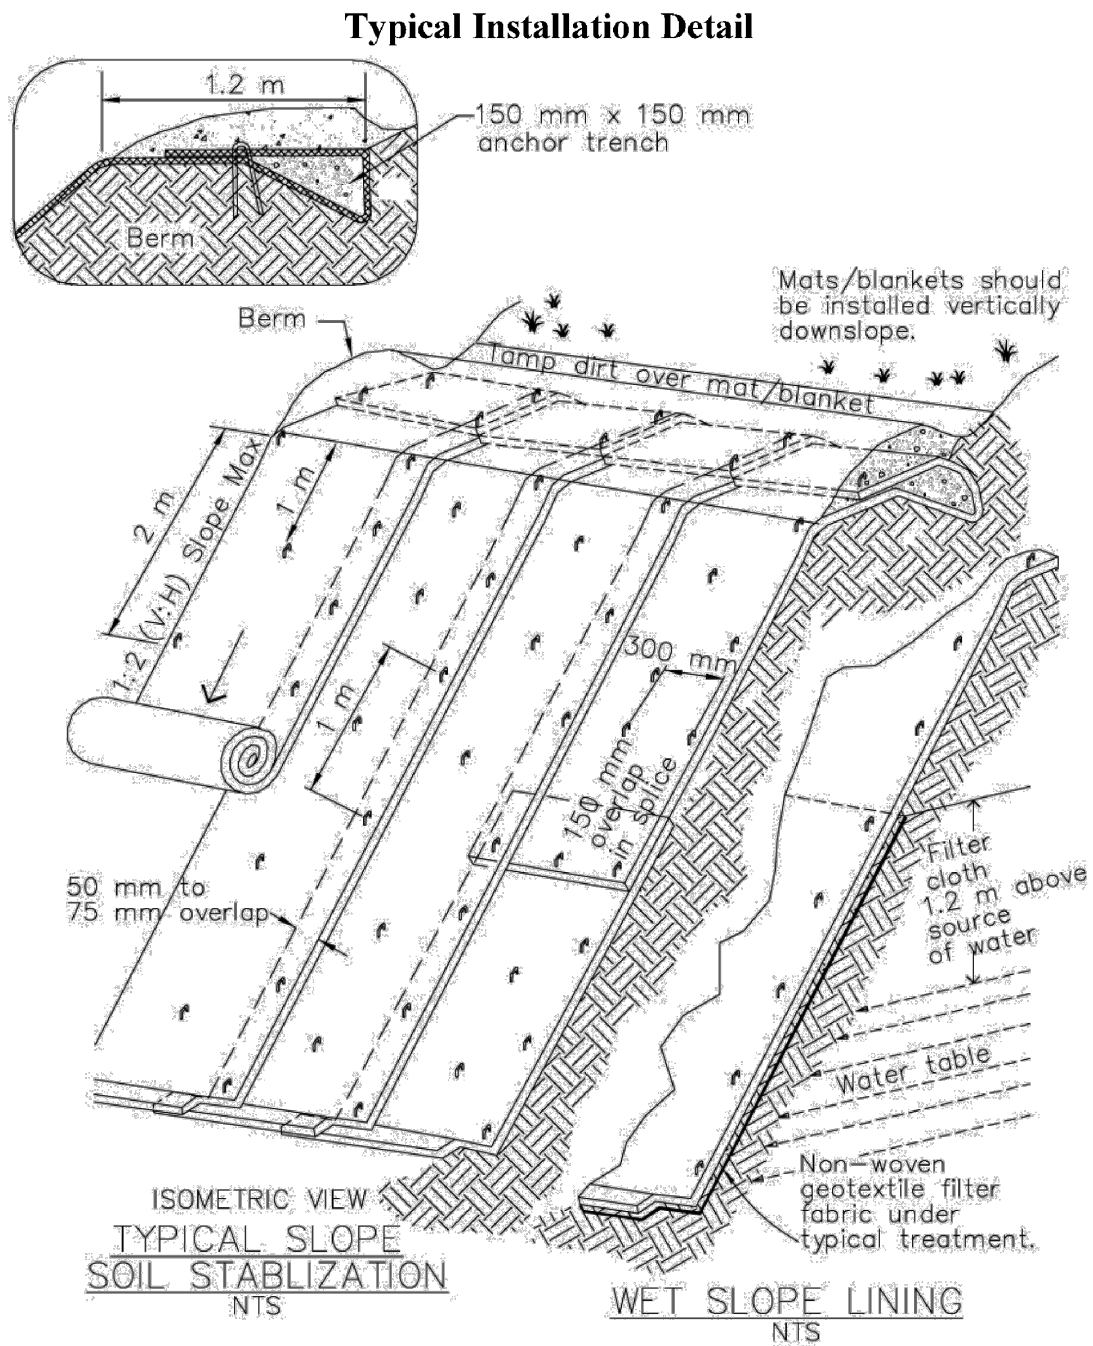

- NOTES:
- Slope surface shall be free of rocks, clods, sticks and grass. Mats/blankets shall have good soil contact.
  - Lay blankets loosely and stake or staple to maintain direct contact with the soil. Do not stretch.
  - Install per manufacturer's recommendations

**ECB EROSION CONTROL BLANKET INSTALLATION**


SCALE: NOT TO SCALE

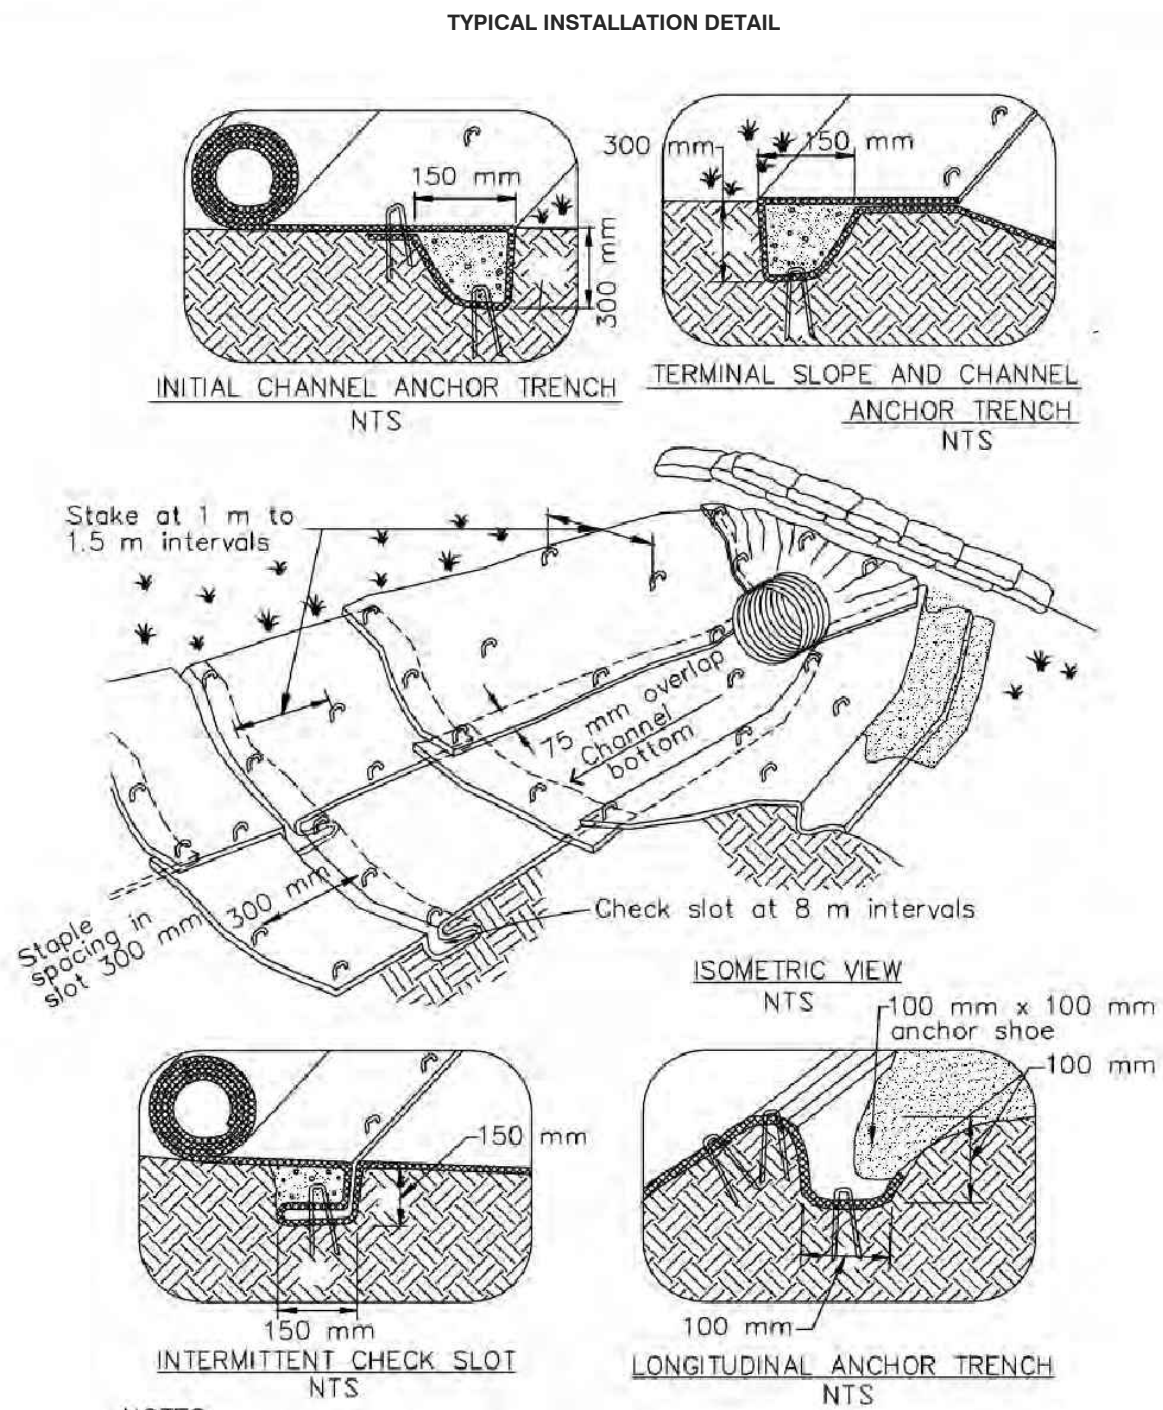

- NOTES:
- Check slots to be constructed per manufacturers specifications.
  - Staking or stapling layout per manufacturers specifications.
  - Install per manufacturer's recommendations


**SM SEEDING**

SCALE: NOT TO SCALE

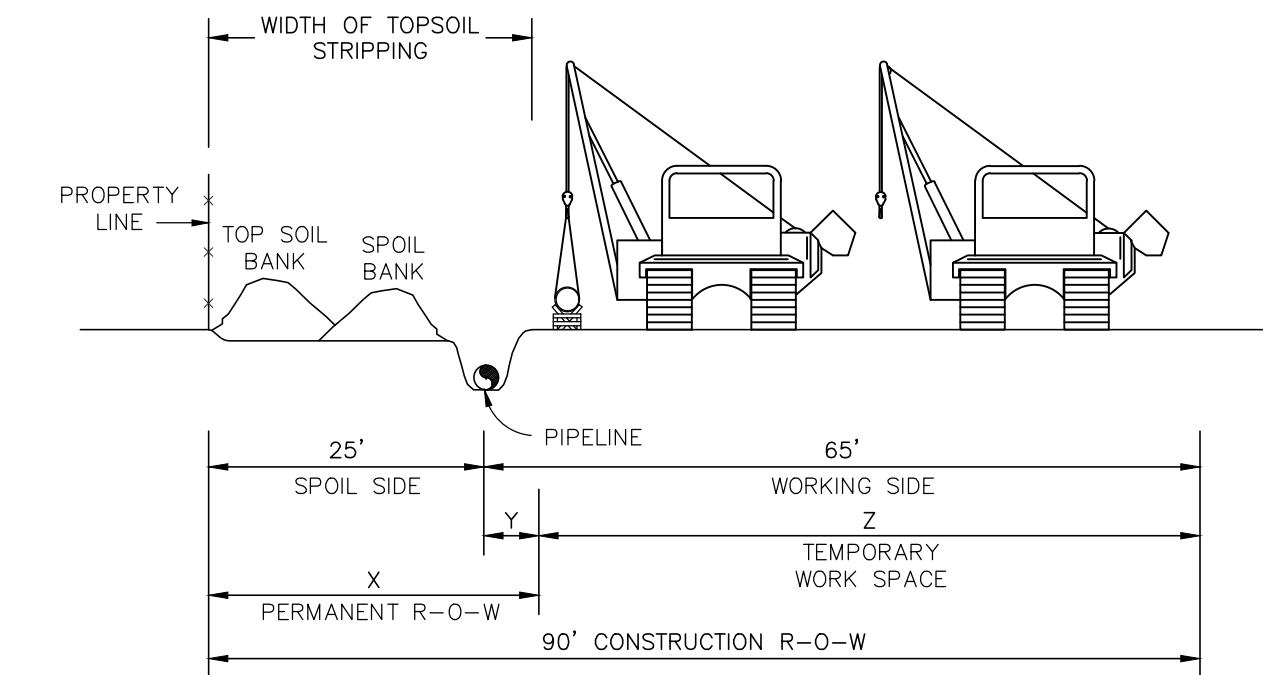

| RIGHT-OF-WAY CONFIGURATION |   |    |  |
|----------------------------|---|----|--|
| X                          | Y | Z  |  |
| 30                         | 5 | 60 |  |

**TYPICAL 16" ROW CONFIGURATION**

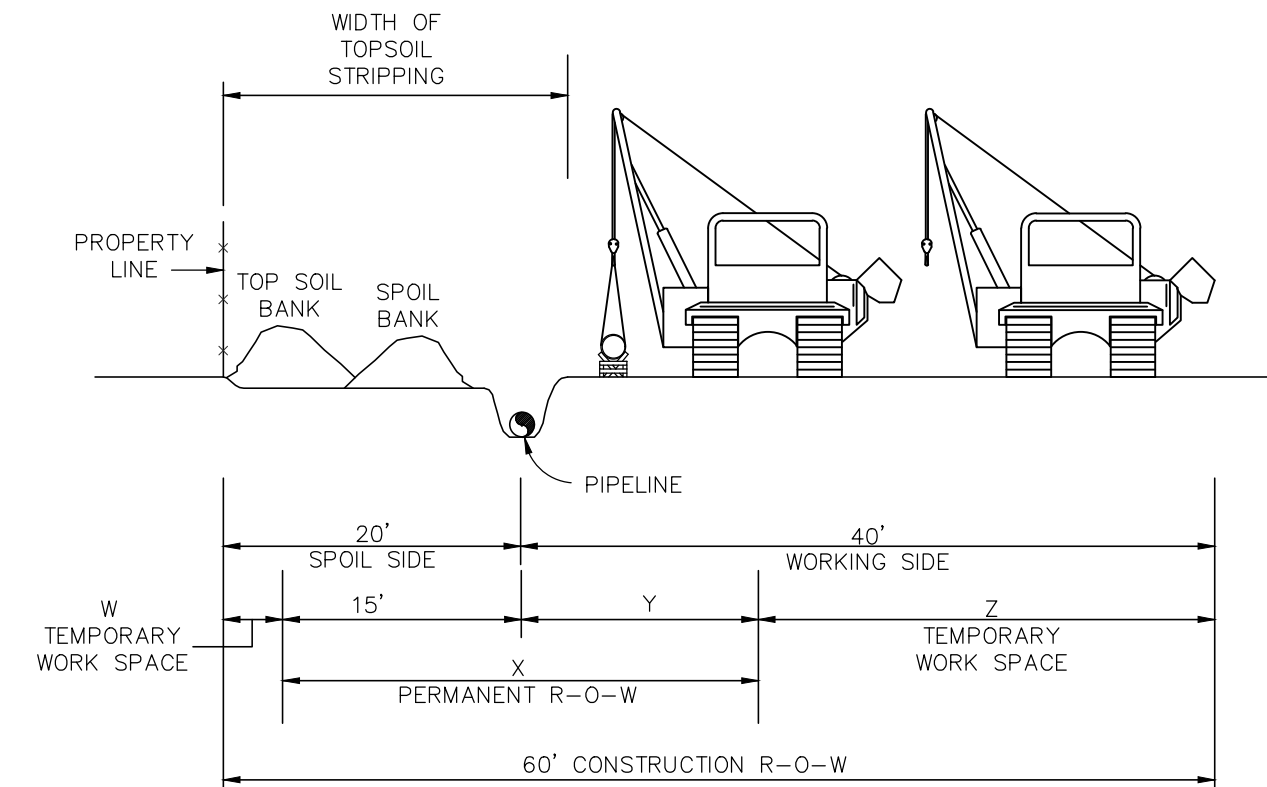

| RIGHT-OF-WAY CONFIGURATION |    |    |    |
|----------------------------|----|----|----|
| W                          | X  | Y  | Z  |
| 5                          | 30 | 15 | 25 |

- NOTES:
- CONFIGURATION DOES NOT INCLUDE ADDITIONAL TEMPORARY WORK SPACE AT CROSSINGS.
  - SEE ALIGNMENT SHEETS FOR ACTUAL ROW CONFIGURATION. X, Y, AND Z VALUES VARY ALONG ROW.
  - SEE ROW RESTRICTIONS LIST FOR ACTUAL PERMANENT AND TEMPORARY ROW WIDTHS.

**LOC LIMITS OF CONSTRUCTION**

SCALE: NOT TO SCALE

**CONTROL MEASURE NOTES**

- (VTC) AASHTO #1 ROCK CONSTRUCTION ENTRANCE  
(IP) INLET PROTECTION  
(RR) RIPRAP  
(SF) SILT FENCE  
(CD) CHECK DAM  
(ECB) EROSION CONTROL BLANKET INSTALLATION  
(SID) SLOPE INTERCEPT DITCH  
(CM) CONSTRUCTION MARKER  
(SM) SEED AND MULCH  
(LOC) LIMITS OF CONSTRUCTION (SEE PROPOSED EASEMENT BOUNDARY / TEMPORARY WORKSPACE BOUNDARY BELOW)
- (1) ATWS WILL HAVE RESTRICTED USE (NO TOP SOIL STORAGE, HAZARDOUS MATERIAL STORAGE, OR REFUELING WILL OCCUR).

**ENVIRONMENTAL NOTES / LEGEND**

- (1) ENVIRONMENTAL EXCLUSION AREAS WILL BE MARKED BY EXCLUSION FENCING AND SIGNAGE.

- PROPOSED CENTERLINE  
PROPOSED EASEMENT BOUNDARY  
TEMPORARY WORKSPACE BOUNDARY  
ADDITIONAL TEMPORARY WORKSPACE  
CONSTRUCTION MARKER  
SLOPE INTERCEPT DITCH  
SILT FENCE  
EROSION CONTROL BLANKET  
AASHTO #1 ROCK CONSTRUCTION ENTRANCE  
BORE ENTRY/EXIT  
ACCESS ROAD
- FOREIGN PIPELINE  
OTHER UTILITY  
EXISTING EASEMENT  
DRAINAGE FLOW  
WETLAND  
STREAM  
FLOODPLAIN  
PROPERTY BOUNDARY  
SECTION BOUNDARY  
TOWNSHIP BOUNDARY

**BILL OF MATERIALS**

**REFERENCE DRAWINGS**

| REF. | DWG. NUMBER | DWG. TITLE |
|------|-------------|------------|
|      |             |            |
|      |             |            |
|      |             |            |
|      |             |            |
|      |             |            |

**CP FEATURE DATA**

**REVISIONS**

| REV. | DATE     | BY  | DESCRIPTION              |
|------|----------|-----|--------------------------|
| 0    | 12/06/24 | ALS | ISSUED FOR PERMIT FILING |
|      |          |     |                          |
|      |          |     |                          |
|      |          |     |                          |
|      |          |     |                          |

**DENVER EXPANSION PROJECT - SCOTT CITY TO DENVER PIPELINE**


|                                                                                                      |                                                                                                                                                      |                                                                                                                                                        |
|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ONEOK</b><br>t: +1 (918) 588-7000<br>ONEOK Plaza<br>100 West Fifth Street<br>Tulsa, OK 74103, USA | <b>MAGELLAN</b><br>WIDESTREAM PARTNERS, L.P.<br>t: +1 (713) 439-3600<br>f: +1 (713) 963-9085<br>11330 Clay Road, Suite 550<br>Houston, TX 77041, USA | <b>exp.</b><br><b>EXP Energy Services Inc.</b><br>t: +1 (713) 439-3600<br>f: +1 (713) 963-9085<br>11330 Clay Road, Suite 550<br>Houston, TX 77041, USA |
|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|

|              |     |        |              |
|--------------|-----|--------|--------------|
| DRAWN BY:    | ALS | DATE:  | 10/02/24     |
| CHECKED BY:  | DS  | SCALE: | NOT TO SCALE |
| APPROVED BY: | SS  | SHEET: | 42 OF 42     |

ALL SEALS FOR THE SET OF DRAWINGS ARE APPLIED TO THE COVER PAGE.

**GRADING, EROSION AND SEDIMENT CONTROL PLAN**  
**ARAPAHOE COUNTY, COLORADO**  
**EROSION CONTROL NOTES & DETAILS**

|              |                 |           |   |
|--------------|-----------------|-----------|---|
| DWG. NUMBER: | 1001-02-001-040 | REVISION: | 0 |
|--------------|-----------------|-----------|---|

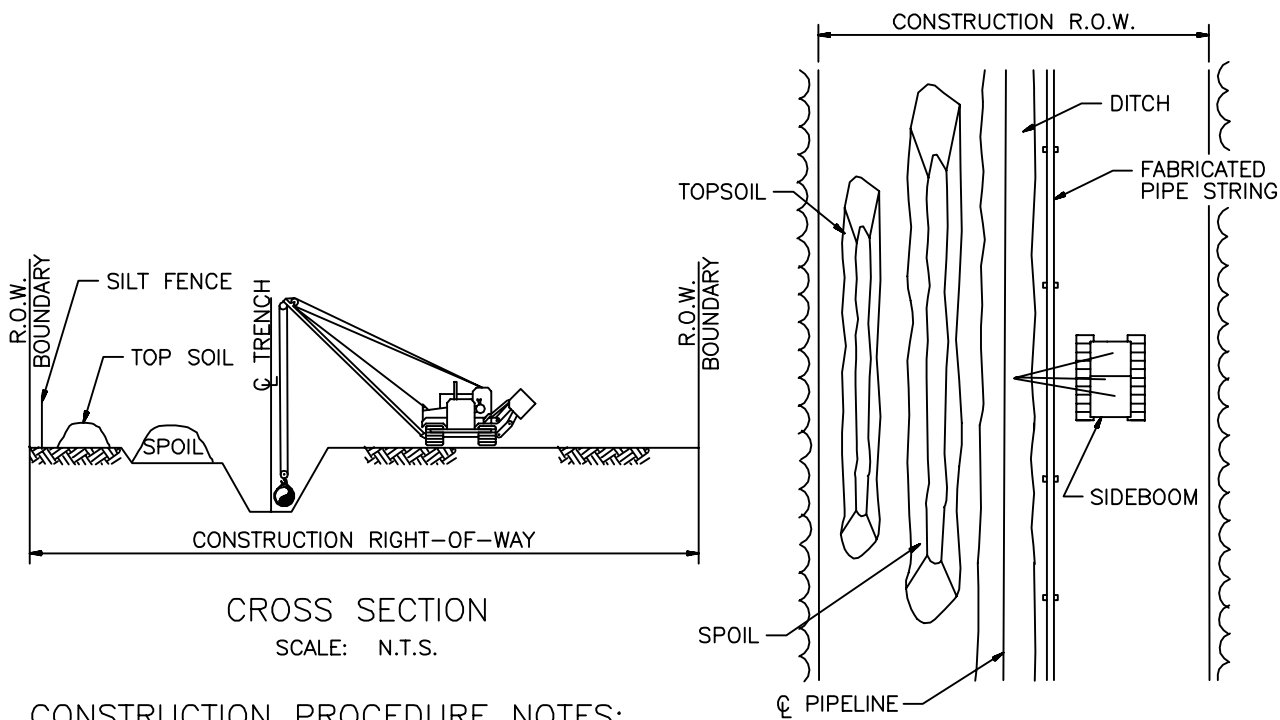


CROSS SECTION  
SCALE: N.T.S.

PLAN VIEW  
SCALE: N.T.S.

# CONSTRUCTION PROCEDURE NOTES:

1. FLAG WETLAND BOUNDARIES PRIOR TO CLEARING.
2. NO REFUELING OF MOBILE EQUIPMENT IS ALLOWED WITHIN 100 FEET OF WETLAND. PLACE "NO FUELING" SIGN POSTS 100 FEET BACK FROM WETLAND BOUNDARY. REFUEL STATIONARY EQUIPMENT AS PER SPCC PLAN.
3. INSTALL TEMPORARY SLOPE BREAKER UPSLOPE WITHIN 100 FEET OF WETLAND BOUNDARY, BUT NOT CLOSER THAN 15 FEET FROM WETLAND BOUNDARY.
4. CONSTRUCT WHEN DRY, IF POSSIBLE. IF SITE BECOMES WET AT TIME OF TRENCHING, AVOID SOIL COMPACTION BY UTILIZING TIMBER RIP-RAP OR PREFABRICATED EQUIPMENT MATS.
5. AVOID ADJACENT WETLANDS. INSTALL SEDIMENT BARRIERS (STRAW BALES AND/OR SILT FENCE) AT DOWN SLOPE EDGE OF RIGHT-OF-WAY ALONG WETLAND EDGE IF EVIDENT, OTHERWISE INSTALL BARRIER ON BOTH EDGES.
6. RESTRICT ROOT GRUBBING TO ONLY THAT AREA OVER THE DITCHLINE AND DITCH SPOIL AREAS. GRIND STUMPS IF NECESSARY IN OTHER AREAS TO FACILITATE CONSTRUCTION.
7. CONDUCT TRENCH LINE TOPSOIL STRIPPING (IF TOPSOIL IS NOT SATURATED). SALVAGE TOPSOIL TO ACTUAL DEPTH OR A MAXIMUM DEPTH OF 12 INCHES, AS DETERMINED BY THE ENVIRONMENTAL INSPECTOR. SEGREGATED TOPSOIL PILE MAY BE LOCATED ON SPOIL SIDE, AS REQUIRED.
8. TRENCH THROUGH WETLANDS.
9. PIPE SECTION MAY BE FABRICATED WITHIN THE WETLAND AND ADJACENT TO ALIGNMENT, OR IN STAGING AREA OUTSIDE THE WETLAND AND WALKED IN.
10. LOWER IN PIPE. PRIOR TO BACKFILLING TRENCH, INSTALL TRENCH PLUG. BACKFILL TRENCH.
11. RESTORE GRADE TO NEAR PRE-CONSTRUCTION TOPOGRAPHY, REPLACE TOPSOIL AND INSTALL PERMANENT EROSION CONTROL.
12. REMOVE ANY TIMBER MATS OR PREFABRICATED MATS FROM WETLANDS UPON COMPLETION. RESTORE WETLANDS TO APPROXIMATE PRECONSTRUCTION CONTOURS.


|                               |                                                                                                                                               |                                            |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
| DRAWN BY: SSL                 |  <b>MAGELLAN</b> <sup>SM</sup><br>MIDSTREAM PARTNERS, L.P. | <i>Magellan Pipeline<br/>Company, L.P.</i> |
| REVISED: MAB 1/28/15          |                                                                                                                                               |                                            |
| DATE: 10/1/2012               |                                                                                                                                               |                                            |
| SCALE: N/A                    |                                                                                                                                               |                                            |
| TYPE I "DRY" WETLAND CROSSING |                                                                                                                                               | 6601-TC-011                                |

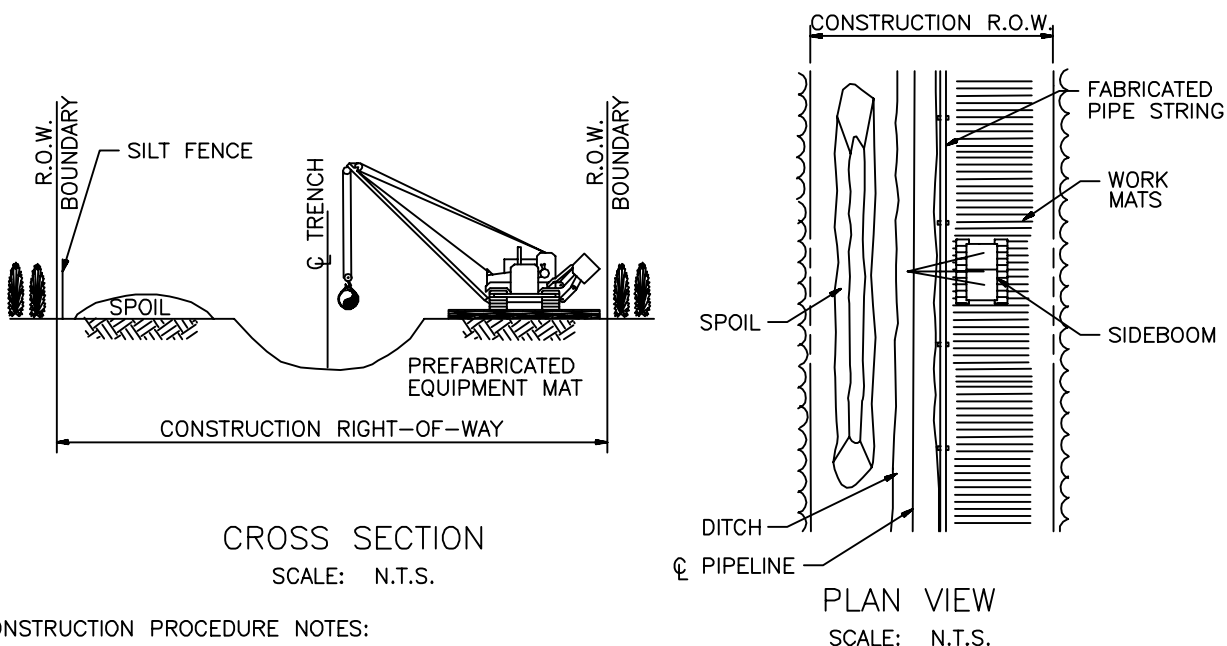

CONSTRUCTION PROCEDURE NOTES:

1. FLAG WETLAND BOUNDARIES PRIOR TO CLEARING.
  2. EQUIPMENT NECESSARY FOR RIGHT-OF-WAY CLEARING MAY MAKE ONE (1) PASS THROUGH THE WETLAND BEFORE MATS ARE INSTALLED.
  3. NO REFUELING OF MOBILE EQUIPMENT IS ALLOWED WITHIN 100 FEET OF WETLAND. PLACE "NO FUELING" SIGN POSTS 100 FEET BACK FROM WETLAND BOUNDARY. REFUEL STATIONARY EQUIPMENT AS PER SPCC PLAN.
  4. INSTALL TEMPORARY SLOPE BREAKER UPSLOPE WITHIN 100 FEET OF WETLAND BOUNDARY IF DIRECTED BY THE ENVIRONMENTAL INSPECTOR.
  5. MINIMIZE SOIL COMPACTION BY UTILIZING PREFABRICATED EQUIPMENT MATS.
  6. AVOID ADJACENT WETLANDS. INSTALL SEDIMENT BARRIERS (STRAW BALES AND/OR SILT FENCE) AT DOWN SLOPE EDGE OF RIGHT-OF-WAY AND ALONG WETLAND EDGE AS REQUIRED.
  7. RESTRICT ROOT GRUBBING TO ONLY THAT AREA OVER THE DITCHLINE AND DITCH SPOIL AREAS. GRIND STUMPS IF NECESSARY IN OTHER AREAS TO FACILITATE CONSTRUCTION.
  8. TOPSOIL STRIPPING SHALL NOT BE REQUIRED IN SATURATED SOIL CONDITIONS.
  9. LEAVE HARD PLUGS AT THE EDGE OF WETLAND UNTIL JUST PRIOR TO TRENCHING.
  10. INSTALL TIMBER MATS THROUGH ENTIRE WETLAND AREA.
  11. TRENCH THROUGH WETLANDS.
  12. PIPE SECTION MAY BE FABRICATED WITHIN THE WETLAND AND ADJACENT TO ALIGNMENT, OR IN STAGING AREA OUTSIDE THE WETLAND AND WALKED IN.
  13. LOWER IN PIPE, INSTALL TRENCH PLUGS AT WETLAND EDGES IF DIRECTED BY THE ENVIRONMENTAL INSPECTOR AND BACKFILL IMMEDIATELY.
  14. REMOVE ANY TIMBER MATS OR PREFABRICATED MATS FROM WETLANDS UPON COMPLETION.
  15. RESTORE GRADE TO NEAR PRE-CONSTRUCTION TOPOGRAPHY, REPLACE TOPSOIL AND INSTALL PERMANENT EROSION CONTROL. CLAY NEEDS TO BE PUT BACK INTO IT'S ORIGINAL LOCATION.
  16. GENERALLY, SEEDING IN WETLANDS WILL NOT BE NECESSARY SINCE WETLANDS REVEGETATE QUICKLY AND SOD WILL REMAIN INTACT EXCEPT OVER TRENCH.
- THE CONTRACTOR SHALL SEED ANY WETLANDS THAT MAY REQUIRE SEEDING AS DETERMINED BY THE ENVIRONMENTAL INSPECTOR.

|                                             |                                                                                                                                               |                                        |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| DRAWN BY: SSL                               |  <b>MAGELLAN</b> <sup>SM</sup><br>MIDSTREAM PARTNERS, L.P. | <i>Magellan Pipeline Company, L.P.</i> |
| REVISED: MAB 1/28/15                        |                                                                                                                                               |                                        |
| DATE: 10/1/2012                             |                                                                                                                                               |                                        |
| SCALE: N/A                                  |                                                                                                                                               |                                        |
| TYPE II "WET" SATURATED<br>WETLAND CROSSING |                                                                                                                                               | 6601-TC-012                            |

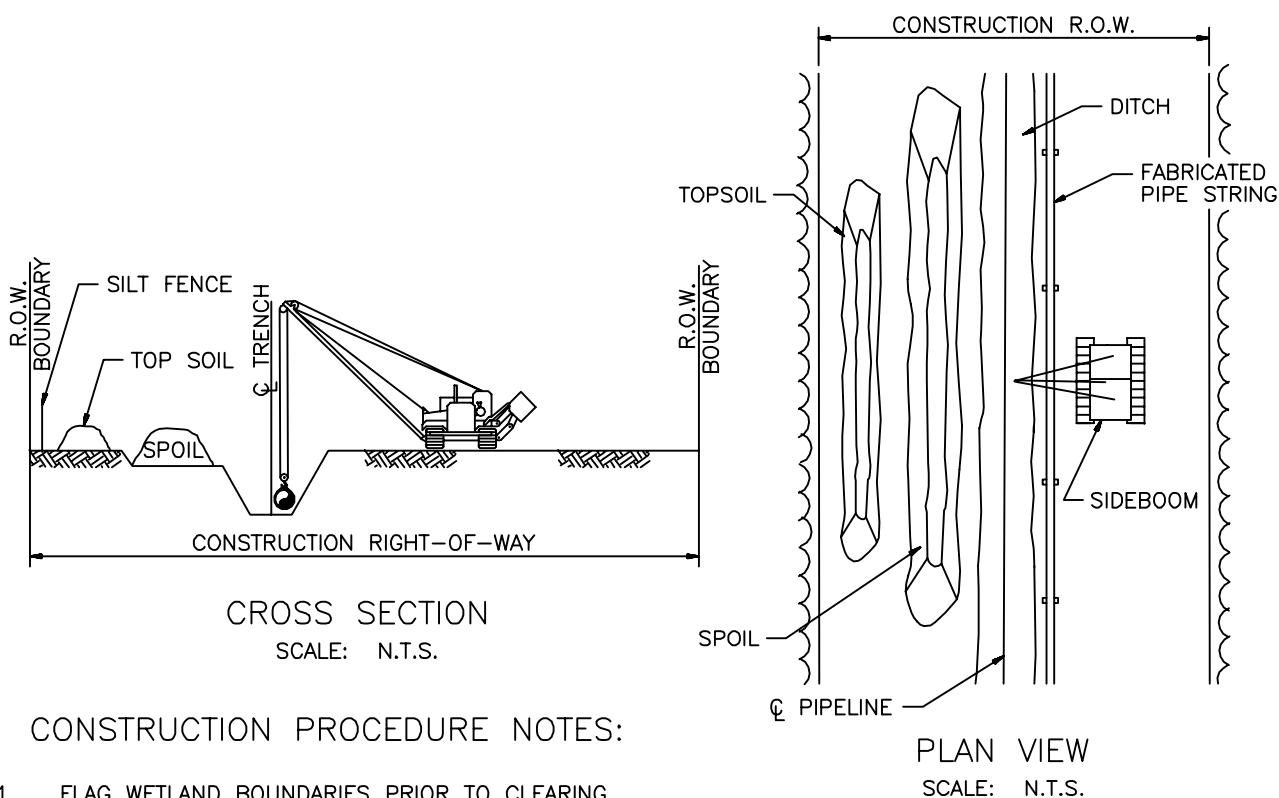

#### CONSTRUCTION PROCEDURE NOTES:

1. FLAG WETLAND BOUNDARIES PRIOR TO CLEARING.
2. NO REFUELING OF MOBILE EQUIPMENT IS ALLOWED WITHIN 100 FEET OF WETLAND. PLACE "NO FUELING" SIGN POSTS 100 FEET BACK FROM WETLAND BOUNDARY. REFUEL STATIONARY EQUIPMENT AS PER SPCC PLAN.
3. INSTALL TEMPORARY SLOPE BREAKER UPSLOPE WITHIN 100 FEET OF WETLAND BOUNDARY IF DIRECTED BY THE ENVIRONMENTAL INSPECTOR.
4. CONSTRUCT WHEN DRY, IF POSSIBLE. IF SITE BECOMES WET AT TIME OF TRENCHING, AVOID SOIL COMPACTION BY UTILIZING TIMBER RIP-RAP OR PREFABRICATED EQUIPMENT MATS.
5. AVOID ADJACENT WETLANDS. INSTALL SEDIMENT BARRIERS (STRAW BALES AND/OR SILT FENCE) AT DOWN SLOPE EDGE OF RIGHT-OF-WAY ALONG WETLAND EDGE IF EVIDENT, OTHERWISE INSTALL BARRIER ON BOTH EDGES.
6. RESTRICT ROOT GRUBBING TO ONLY THAT AREA OVER THE DITCHLINE AND DITCH SPOIL AREAS. GRIND STUMPS IF NECESSARY IN OTHER AREAS TO FACILITATE CONSTRUCTION.
7. CONDUCT TRENCH LINE TOPSOIL STRIPPING (IF TOPSOIL IS NOT SATURATED). SALVAGE TOPSOIL TO ACTUAL DEPTH OR A MAXIMUM DEPTH OF 12 INCHES, AS DETERMINED BY THE ENVIRONMENTAL INSPECTOR. SEGREGATED TOPSOIL PILE MAY BE LOCATED ON SPOIL SIDE, AS REQUIRED.
8. TRENCH THROUGH WETLANDS.
9. PIPE SECTION MAY BE FABRICATED WITHIN THE WETLAND AND ADJACENT TO ALIGNMENT, OR IN STAGING AREA OUTSIDE THE WETLAND AND PUSHED / PULLED OR WALKED IN.
10. LOWER IN PIPE. PRIOR TO BACKFILLING TRENCH, TRENCH PLUG REQUIREMENTS SHALL BE DETERMINED BY THE ENVIRONMENTAL INSPECTOR. BACKFILL TRENCH.
11. RESTORE GRADE TO NEAR PRE-CONSTRUCTION TOPOGRAPHY, REPLACE TOPSOIL AND INSTALL PERMANENT EROSION CONTROL.
12. REMOVE ANY TIMBER MATS OR PREFABRICATED MATS FROM WETLANDS UPON COMPLETION.

DRAWN BY: SSL

APPROVED:

DATE: 10/1/2012

SCALE: N/A





**MAGELLAN**<sup>SM</sup>  
MIDSTREAM PARTNERS, L.P.

**Magellan Pipeline  
Company, L.P.**

**TYPE III 'WET' FLOODED WETLAND  
CROSSING (PUSH / PULL)**

**6601-TC-013**

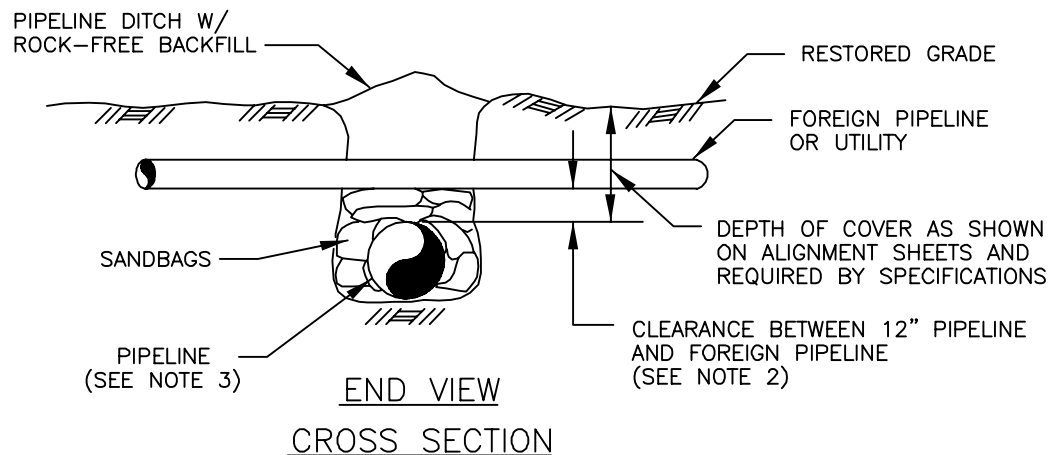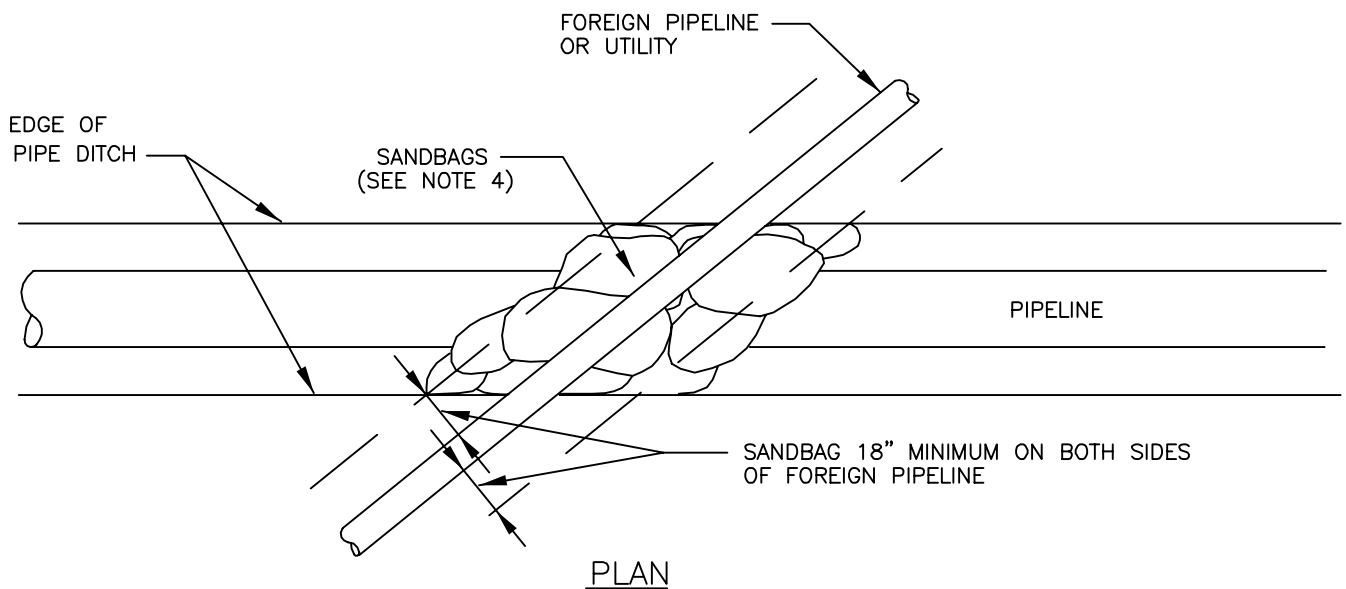


NOTES:


1. TYPE CP-2 CATHODIC PROTECTION TEST STATION SHALL BE INSTALLED AT FOREIGN PIPELINE CROSSINGS, WHEN INDICATED ON THE ALIGNMENT SHEETS (REF: DWG. 50263-TY-057).
2. MAINTAIN 24" MINIMUM CLEARANCE WHEN CROSSING OVER OR UNDER FOREIGN PIPELINES.
3. PIPELINE TO BE PLACED ABOVE, IF FOREIGN PIPELINE OR UTILITY IS BURIED AT DEPTH SUCH THAT 24" SEPERATION AND MINIMUM 36" COVER IS MAINTAINED OVER PIPELINE, OTHERWISE PIPELINE TO BE PLACED UNDER FOREIGN PIPELINE OR UTILITY.
4. SANDBAGS CONSIST OF BURLAP BAGS FILLED WITH EARTH THAT IS FREE OF SHARP ROCKS, TWIGS, AND OTHER OBJECTIONABLE MATERIALS (TOP SOIL SHALL NOT BE USED). USE OF SYNTHETIC MATERIALS FOR BAGS IS NOT ACCEPTABLE.

|                  |                                                                                                                                               |                                        |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| DRAWN BY: LN     |  <b>MAGELLAN</b> <sup>SM</sup><br>MIDSTREAM PARTNERS, L.P. | <b>Magellan Pipeline Company, L.P.</b> |
| APPROVED:        |                                                                                                                                               |                                        |
| DATE: 10/19/2012 | FOREIGN ONSHORE PIPE TYPICAL DRAWING<br>FOREIGN PIPELINE/ UTILITY CROSSING                                                                    | <b>6601-TC-018</b>                     |
| SCALE: N/A       |                                                                                                                                               |                                        |


Note: These structures are to be built over a heavy plastic sheet.

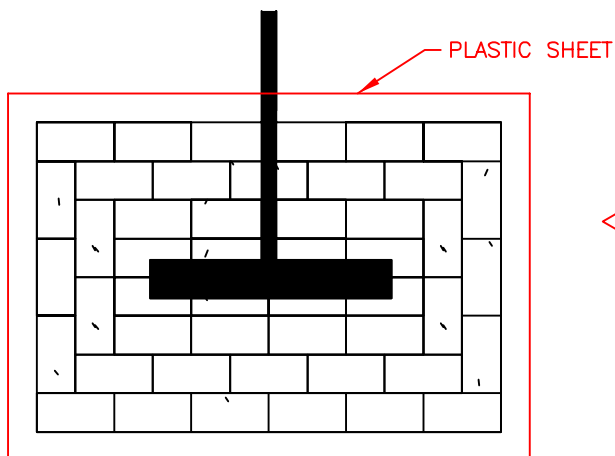


PLAN VIEW  
(NOT TO SCALE)

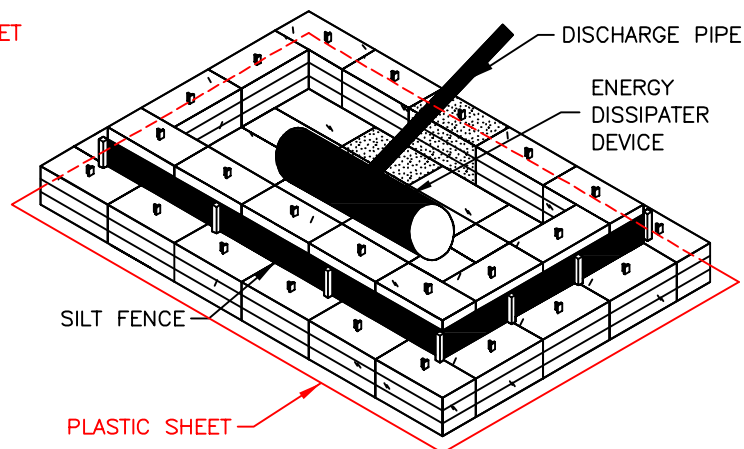

ISOMETRIC VIEW  
(NOT TO SCALE)

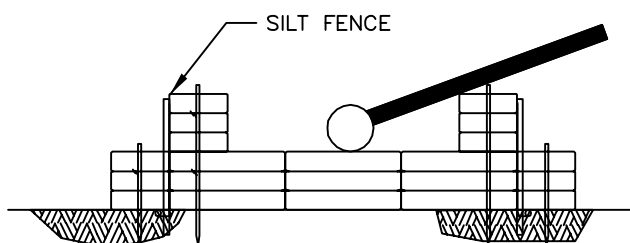

OPTION 1

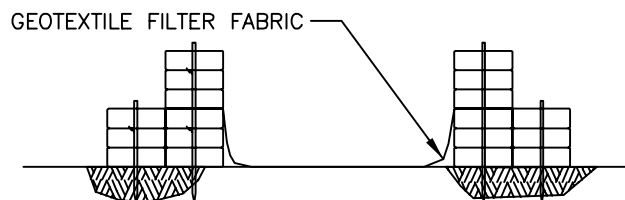

OPTION 2

#### NOTES:

1. INSTALL A STRAW BALE DEWATERING STRUCTURE WHEREVER IT IS NECESSARY AND AS DIRECTED BY THE ENGINEER TO PREVENT THE FLOW OF HEAVILY SILT LADEN WATER INTO WATER BODIES OR WETLANDS. ALL DEWATERING ACTIVITIES SHALL BE CONDUCTED IN ACCORDANCE WITH PERMIT CONDITIONS.
2. DISCHARGE SITE SHOULD BE WELL VEGETATED AND LOCATED AT LEAST 100 FT FROM ANY WATERCOURSE. THE TOPOGRAPHY OF THE SITE SHOULD BE SUCH THAT WATER WILL FLOW INTO THE DEWATERING STRUCTURE AND AWAY FROM ANY WORK AREAS. THE AREA DOWNSLOPE FROM THE SITE MUST BE REASONABLY LEVEL OR STABILIZED BY VEGETATION OR OTHER MEANS TO ALLOW THE FILTERED WATER TO CONTINUE AS SHEET FLOW.
3. DIRECT THE PUMPED WATER ONTO A STABLE SPILL PAD CONSTRUCTED OF STRAW BALES, ROCK FILL, WEIGHTED TIMBERS, OR A WOVEN GEOTEXTILE STAKED TO THE GROUND SURFACE.
4. DISCHARGE RATES SHOULD BE SUCH THAT THE STRUCTURE WILL NOT OVERFLOW.
5. DISCHARGE WATER TO BE FORCED INTO SHEET FLOW IMMEDIATELY BEYOND THE SPILL PAD USING A COMBINATION OF STRAW BALES AND THE NATURAL TOPOGRAPHY. RECESS STRAW BALES A MINIMUM OF 4 IN. DRIVE TWO STAKES OR REBAR INTO EACH BALE TO ANCHOR THEM IN PLACE.
6. MANUFACTURED FILTER BAGS ARE A SUITABLE ALTERNATIVE TO STRAW BALE STRUCTURES FOR TRENCH DEWATERING.
7. ENERGY DISSIPATER DEVICE SHALL BE ANCHORED BY CONTRACTOR.

DRAWN BY: LN

REVISED: MAB 7/6/16

DATE: 10/19/2012

SCALE: N/A




**MAGELLAN**<sup>SM</sup>  
MIDSTREAM PARTNERS, L.P.


**Magellan Pipeline  
Company, L.P.**

HYDROSTATIC TEST  
DEWATERING STRUCTURE

**6601-TC-019**

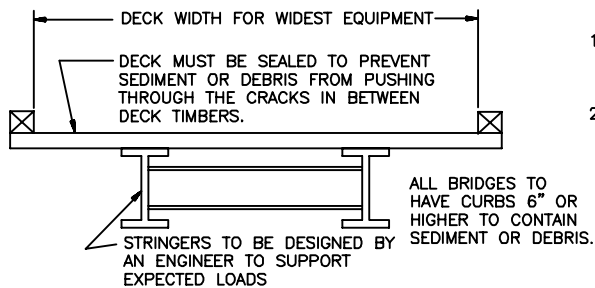


### SECTION 'A-A'

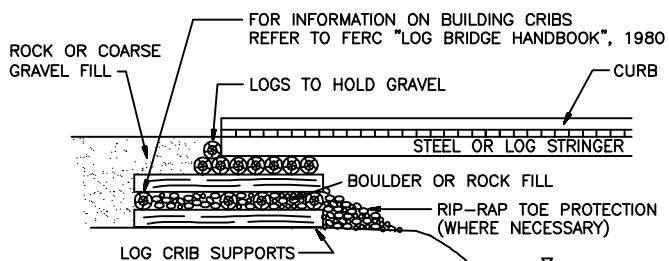

POSSIBLE CONFIGURATION FOR TEMPORARY CRIB ABUTMENT


THE FOLLOWING IS A SEQUENCE OF CONSTRUCTION AND MITIGATION MEASURES TO BE FOLLOWED AT ALL TEMPORARY BRIDGE CROSSINGS.

1. A PRE-FABRICATED BRIDGE OR FLATBED RAILCAR, FLEXI-FLOAT OR FLUMED VEHICLE CROSSING MAY BE SUBSTITUTED FOR THE TEMPORARY BRIDGE.
2. INSTALL THE BRIDGE IN A MANNER THAT WILL MINIMIZE SEDIMENT ENTERING THE WATER. STRINGERS MUST BE DESIGNED TO SUPPORT THE LOADS EXPECTED ON THE BRIDGE. CURBS AT LEAST 6 IN. HIGH MUST BE INSTALLED ALONG THE EDGE OF THE DECK TO CONTAIN SEDIMENT AND DEBRIS ON THE BRIDGE. FASTENERS CONNECTING COMPONENTS MUST BE STRONG ENOUGH TO HOLD THEM IN POSITION DURING THE LIFE OF THE BRIDGE. CRIBS MAY BE FILLED WITH ROCK OR COBBLE, OR MAY BE SOLID TIMBER ROTATED 90° IN ALTERNATIVE LAYERS. RIP-RAP EROSION PROTECTION IS TO BE PLACED AROUND THE CRIBS AND ON ANY FILL SLOPES PROJECTING INTO THE WATER.
3. ROAD APPROACHES LEADING TO THE BRIDGE MUST BE RAISED AND STABLE SO EQUIPMENT LOADS ARE SUPPORTED A SUFFICIENT DISTANCE BACK FROM THE WATER TO REDUCE SEDIMENT AND DEBRIS ENTERING THE STREAM FROM EQUIPMENT TRACKS. DO NOT USE SOIL TO CONSTRUCT OR STABILIZE EQUIPMENT BRIDGES. IF CUTS ARE NEEDED TO OBTAIN A SATISFACTORY GRADE, THEY ARE TO BE DUG WITH SIDE DITCHES AND STABLE SLOPES. EROSION AND SEDIMENT CONTROL MEASURES ARE TO BE INSTALLED TO KEEP SEDIMENT ON LAND (E.G., SILT FENCING, FILTER CLOTH, RIP-RAP, SEED AND MULCH, ETC.).
4. PERIODICALLY CHECK BRIDGE INSTALLATION AND REMOVE ANY BUILD-UP OF SEDIMENT OR DEBRIS ON THE BRIDGE.
5. CONTRACTOR IS RESPONSIBLE FOR VERIFYING ADEQUACY OF DESIGN.

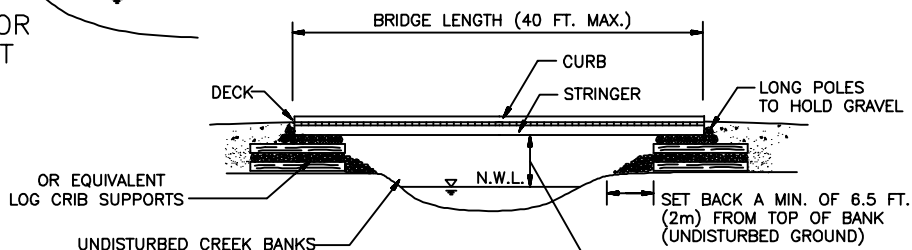

### BRIDGE PROFILE

ENSURE ADEQUATE OPENING TO ALLOW ANTICIPATED INCREASE IN STREAM DISCHARGE (REFER TO "SIZING OF WATER OPENING")

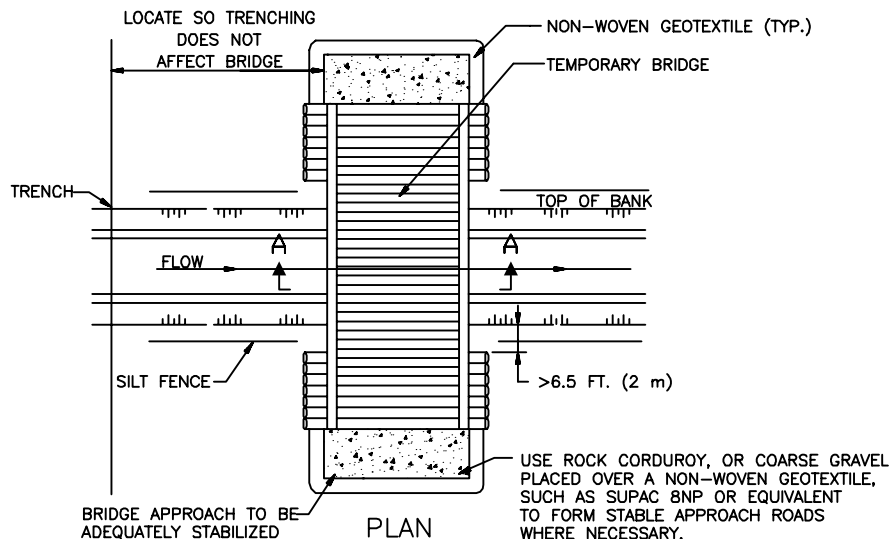

DRAWN BY: LN

APPROVED:

DATE: 10/19/2012

SCALE: N/A




**MAGELLAN**  
MIDSTREAM PARTNERS, L.P.

**Magellan Pipeline  
Company, L.P.**

TYPICAL TEMPORARY BRIDGE

6601-TC-023

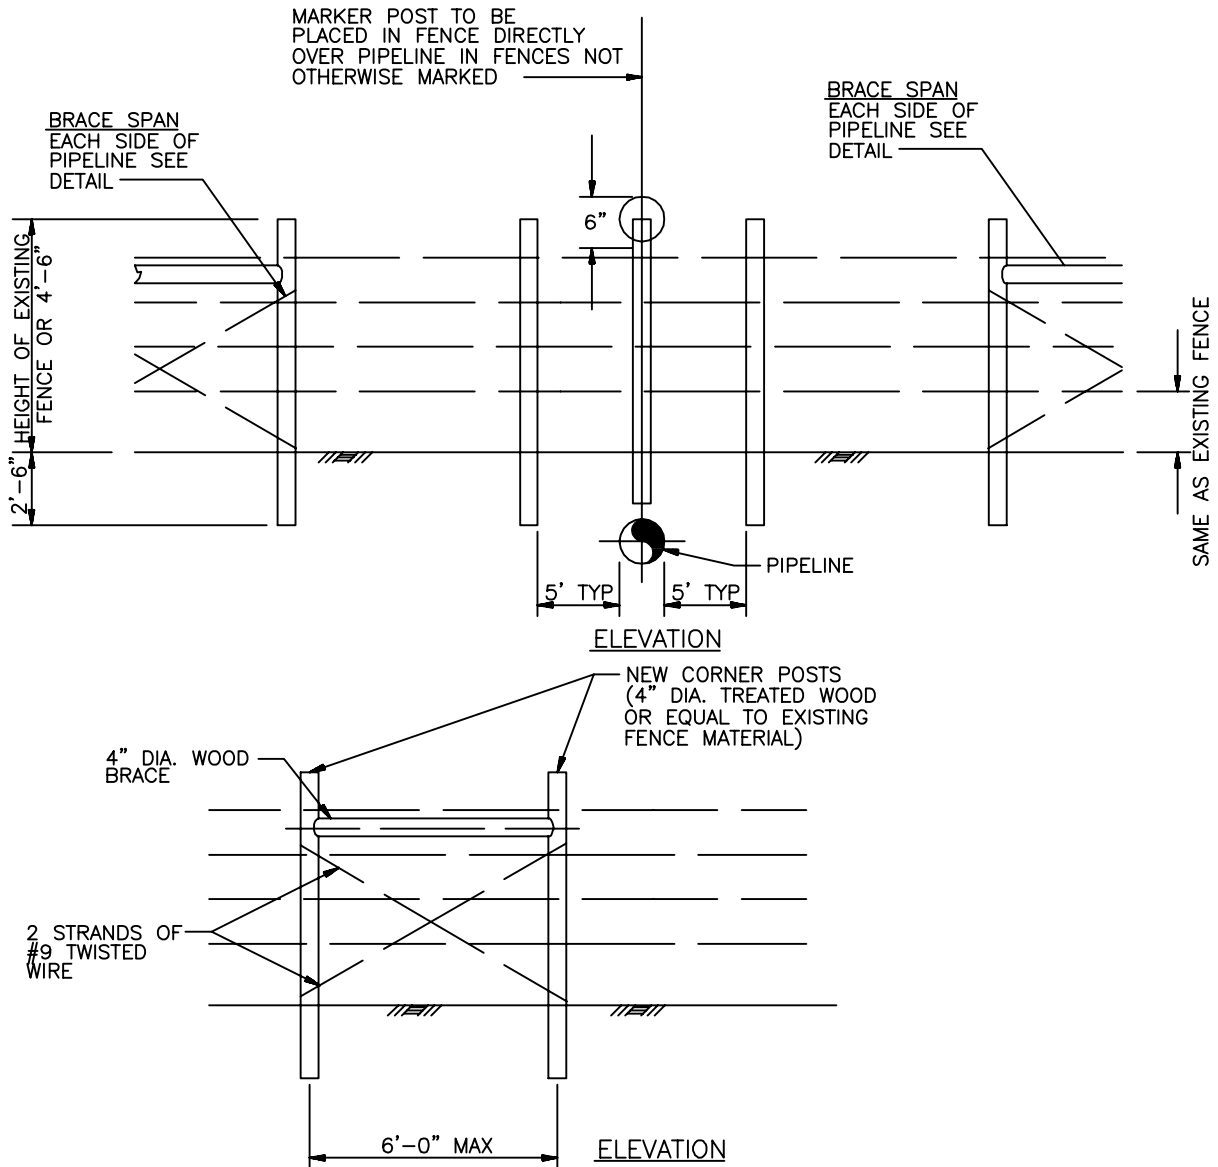

## NOTES:

1. POSTS, WIRE AND OTHER MATERIALS SHALL BE OF EQUAL OR NEW MATERIAL TO MATCH EXISTING FENCE.
2. BRACE SPAN TO BE CONSTRUCTED ON EACH SIDE OF PIPELINE CROSSING PRIOR TO INITIAL DISMANTLING OF FENCE.
3. MARKERS TO BE INSTALLED AT PROPERTY LINE FENCES ONLY.

DRAWN BY: LN

APPROVED:

DATE: 10/19/2012

SCALE: N/A



**MAGELLAN**<sup>SM</sup>  
MIDSTREAM PARTNERS, L.P.

**Magellan Pipeline  
Company, L.P.**

FENCE CUT  
AND RESTORATION

**6601-TC-025**